

DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Features

- Input Rating of 32V
- Input Overvoltage Protection with 6.5V
- Input Voltage Dynamic Power Management
- 10% Charge Current Accuracy
- 1% Charge Voltage Accuracy
- Pin ISET2 can select 100mA or 500mA Maximum Input Current Limit
- Programmable Termination and Trickle Threshold
- Fixed 10 Hour Safety Timer
- Status Indication – Charging/Done
- Integrated Auto Start Function for Production
- 125°C Thermal Regulation
- 150°C Thermal Shutdown Protection
- BAT Short-Circuit Protection
- Charge Solutions for JEITA (DIO5090A):
 1. No charge at 'Temp>50°C' & 'Temp<0°C';
 2. 0.2*CC (Constant-Current) Temp at 0~10°C;
 3. Constant-Current Temp at 10~45°C;
 4. 0.5*CC & BAT voltage = $V_{BAT}-0.1 \text{ Temp}$ at 45~50°C.(DIO5090B, DIO5090D):
 1. No charge at 'Temp>45°C' & 'Temp<0°C';
 2. 0.2*CC (Constant-Current) Temp at 0~10°C;
 3. Constant-Current Temp at 10~45°C.
 4. DIO5090D has dedicated BAT_V pin for battery voltage sense.
- Automatic Termination and Timer Disable Mode (TTDM) for Absent Battery Pack With Thermistor
- Package: EP-MSOP10

Descriptions

DIO5090X is highly integrated lithium ion and lithium polymer linear chargers, suitable for portable applications with limited space. The device is powered by a USB port or AC adapter. The high input voltage range with input overvoltage protection supports low-cost, unregulated adapters.

DIO5090X has a single power output and can charge batteries. If the average system load fails to charge the battery during the 10-hour safety timer, the system load can be connected in parallel with the battery.

The device has three stages for charging a Li-Ion battery: regulation, constant current and constant voltage. In all charging stages, IC junction temperature is monitored by the internal control loop. When the charging current exceeds the internal temperature threshold, the internal control loop will reduce the charging current.

The charger power level and charging current induction function are fully integrated. The charger has high precision current and voltage regulation circuit function, charging status display, charging termination function. Trickle-charge current and terminal current threshold can be programmed by external resistance on DIO5090X. The value of constant current can also be programmed by an external resistance.

Applications

- Low-Power Handheld Devices
- Smart Phones
- MP3 Players
- PDAs



DIO5090X

Ordering Information

| Order Part Number | Top Marking | | T _A | Package | |
|-------------------|-------------|-------|----------------|-----------|-------------------|
| DIO5090AXM10 | DEV9VA | Green | -40 to 85°C | EP-MSOP10 | Tape & Reel, 3000 |
| DIO5090BXM10 | DEV9VB | Green | -40 to 85°C | EP-MSOP10 | Tape & Reel, 3000 |
| DIO5090DXM10 | DEV9VD | Green | -40 to 85°C | EP-MSOP10 | Tape & Reel, 3000 |

Pin Assignment

EP-MSOP10

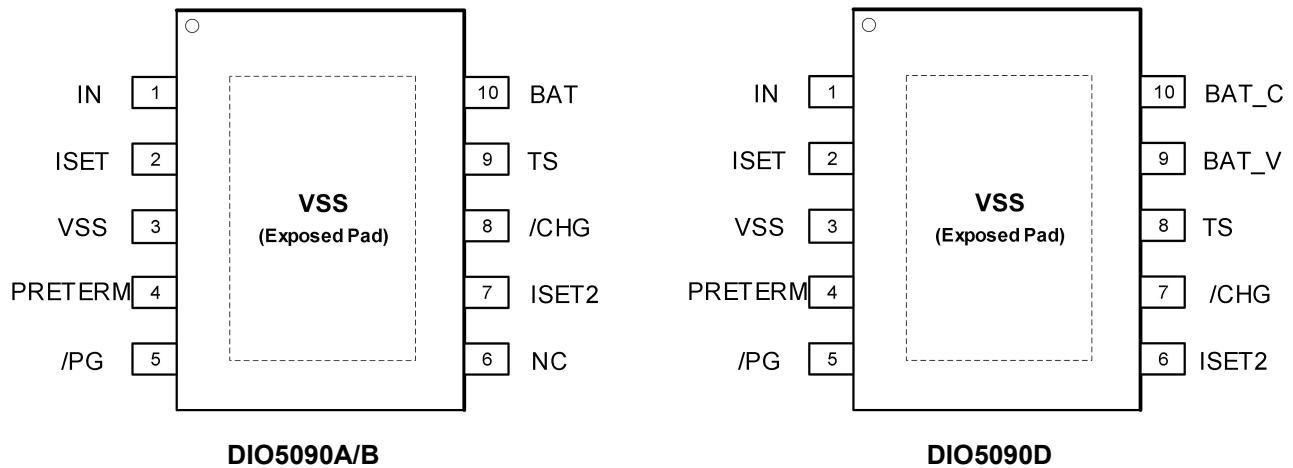


Figure 1. Top View

Pin Descriptions

| Name | Description |
|----------|--|
| IN | Input power, connected to external DC supply (AC adapter or USB port). Expected range of bypass capacitors 1 μ F to 10 μ F, connect from IN to VSS. |
| ISET | Programs the constant charge current setting. External resistor from ISET to VSS defines constant charge current value. Range is 9k Ω (50mA) to 0.45k Ω (1000mA). |
| ISET2 | Programming the Input / Output Current Limit for the USB or Adaptor source: High = 500mA max, Low = ISET, FLOAT = 100mA max. |
| VSS | Ground. |
| PRE TERM | Programs the Current Termination Threshold (10 to 40% of IBAT which is set by ISET) and Sets the Trickle Current to twice the Termination Current Level. Expected range of programming resistor is 1k to 5.1k Ω (2k: 0.12*CC for term; 0.24*CC for Trickle Current) |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

| | |
|-------------|---|
| /PG | Low (FET on) indicates the input voltage is above UVLO and the BAT (battery) voltage. |
| NC | No Connect. |
| /CHG | Low (FET on) indicates charging and Open Drain (FET off) indicates no Charging or Charge complete. |
| TS | Temperature sense terminal connected to DIO5090X -10k at 25°C NTC thermistor, in the battery pack. Floating T terminal or pulling High puts part in TTDM “Charger” Mode and disable TS monitoring, Timers and Termination. Pulling terminal Low disables the IC. If NTC sensing is not needed, connect this terminal to VSS through an external 10 kΩ resistor. A 250kΩ from TS to ground will prevent IC entering TTDM mode when battery with thermistor is removed. |
| BAT | Battery connection. System Load may be connected. Expected range of bypass capacitors 1μF to 10μF. |
| BAT_V | Sensing the battery voltage and suggest to directly connected to battery. (Only for DIO5090D) |
| BAT_C | BAT current connection. System Load may be connected. Expected range of bypass capacitors 1μF to 10μF. (Only for DIO5090D) |
| Exposed Pad | There is an internal electrical connection between the exposed thermal pad and the VSS terminal of the device. The thermal pad must be connected to the same potential as the VSS terminal on the printed circuit board. Do not use the thermal pad as the primary ground input for the device. VSS terminal must be connected to ground at all times. |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

| Parameter | | Rating | Unit |
|-----------------------------|--|------------|------|
| Input Voltage | IN (with respect to VSS) | -0.3 to 36 | V |
| | BAT (with respect to VSS) | -0.3 to 7 | |
| | PRE TERM, ISET, ISET2, TS, /CHG, /PG (with respect to VSS) | -0.3 to 7 | |
| Input Current | IN | 1.25 | A |
| Output Current (Continuous) | BAT | 1.25 | A |
| Output Sink Current | /CHG | 15 | mA |
| Junction Temperature | | -40 to 150 | °C |
| Storage Temperature | | -65 to 150 | °C |
| Package Thermal Resistance | Θ_{JA} | 72 | °C/W |
| ESD | Human-body model (HBM) | ±6000 | V |

Recommend Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended Operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not Recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol | Parameter | Min | Max | Unit |
|-----------------|---|------|-----|------------|
| V_{IN} | IN voltage range | 3.5 | 32 | V |
| | IN operating voltage range, Restricted by V_{DPM} and V_{OVP} | 4.45 | 6.3 | V |
| I_{IN} | Input current, IN terminal | | 1 | A |
| I_{BAT} | Current, BAT terminal | | 1 | A |
| T_J | Junction temperature | 0 | 125 | °C |
| $R_{PRE\ TERM}$ | Programs trickle charge and termination current thresholds | 1 | 10 | k Ω |
| R_{ISET} | Constant charge current programming resistor | 0.5 | 20 | k Ω |
| R_{TS} | 10k NTC thermistor range without entering TTDM | 1.66 | 500 | k Ω |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Electrical Characteristics

Over junction temperature range $T_A=25\text{ }^{\circ}\text{C}$ and recommended supply voltage (unless otherwise noted).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------------|---|--|------|-----|------|------|
| INPUT | | | | | | |
| UVLO | Under voltage lock-out Exit | V _{IN} : From Low to High | 2.85 | 3.0 | 3.15 | V |
| V _{HYS_UVLO} | Hysteresis | | | 180 | | mV |
| V _{IN_DT} | Input power good detection threshold is V _{BAT} +V _{IN_DT} | (Input power good if V _{IN} > V _{BAT} + V _{IN-DT}); V _{BAT} =3.6V, V _{IN} :3.5V → 4V | | 120 | | mV |
| V _{HYS-INDT} | Hysteresis on V _{IN-DT} falling | | | 80 | | mV |
| V _{OVP} | Input over-voltage protection threshold | V _{IN} : 5V → 12V | 6.3 | 6.5 | 6.9 | V |
| V _{HYS-OVP} | Hysteresis on OVP | V _{IN} : 12V → 5V | | 200 | | mV |
| V _{IN-DPM} | USB/Adaptor low input voltage protection. Restricts I _{BAT} at V _{IN_DPM} | Limit Input Source Current to 50mA; V _{BAT} =3.5V; R _{ISSET} =2KΩ | | 4.4 | | V |
| I _{IN-USB-CL} | USB input I-Limit 100mA | ISET2 = Float; R _{ISSET} =1KΩ | 75 | 90 | 105 | mA |
| | USB input I-Limit 500mA | ISET2 = High; R _{ISSET} =1KΩ | 400 | 445 | 490 | |
| BATTERY SHORT PROTECTION | | | | | | |
| V _{BAT(SC)} | BAT terminal short-circuit detection threshold/trickle charge threshold | V _{BAT} :3V → 0.5V, no deglitch | 0.75 | 0.8 | 0.85 | V |
| V _{BAT(SC-HYS)} | BAT terminal Short hysteresis | Recovery ≥ V _{BAT(SC)} + V _{BAT(SC-HYS)} ; Rising, no Deglitch | | 20 | | mV |
| I _{BAT(SC)} | Source current to BAT terminal during short-circuit detection | | | 10 | | mA |
| QUIESCENT CURRENT | | | | | | |
| I _{BAT(PDWN)} | Battery current into BAT terminal | V _{IN} = 0V | | | 1 | μA |
| I _{BAT(DONE)} | BAT terminal current, charging terminated | V _{IN} = 6V, V _{BAT} > V _{BAT(REG)} | | | 1 | |
| I _{IN(STDBY)} | Standby current into IN terminal | TS = Low, V _{IN} ≤ 6V | | | 125 | μA |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

| | | | | | | |
|--|--|---|--|-----|------|----------------------|
| I _{CC} | Active supply current, I _N terminal | TS = open, V _{IN} = 6V, T _{TDM} – no load on BAT terminal, V _{BAT} > V _{BAT(REG)} , IC enabled | | 0.4 | 0.5 | mA |
| BATTERY CHARGER CONSTANT-CHARGE | | | | | | |
| V _{BAT(REG)} | Battery regulation voltage | V _{IN} = 5V, (V _{TS-45°C} ≤ V _{TS} ≤ V _{TS-0°C}) | 4.16 | 4.2 | 4.23 | V |
| V _{O_HT(REG)} | Battery hot regulation Voltage | V _{IN} = 5V, (V _{TS-50°C} ≤ V _{TS} ≤ V _{TS-45°C}) | | 4.1 | | V |
| I _{BAT_(RANGE)} | Programmed output “constant charge” current | V _{BAT(REG)} > V _{BAT} > V _{LOWV} ; V _{IN} = 5V, ISET2=Low, R _{ISET} = 9KΩ to 0.45KΩ | 50 | | 1000 | mA |
| V _{DO(IN-BAT)} | Drop-out, V _{IN} – V _{BAT} | Adjust V _{IN} down until I _{BAT} = 0.5A, V _{BAT} = 4.15V, R _{ISET} = 1KΩ , ISET2 = Low; T _J ≤ 100°C | 325 | | 500 | mV |
| I _{BAT} | Output “constant current” formula | V _{BAT(REG)} > V _{BAT} > V _{LOWV} ; V _{IN} = 5V, ISET2 = Low | (1V/R _{ISET})*450 | | | A |
| Trickle Current – SET BY PRE-TERM terminal | | | | | | |
| V _{LOWV} | Trickle current to constant current charge transition threshold | | 2.4 | 2.5 | 2.6 | V |
| I _{Trickle} | Trickle current, default setting | V _{BAT} < V _{LOWV} ; R _{ISET} = 1kΩ; R _{PRE-TERM} = High Z | 18 | 24 | 28 | %I _{BAT-CC} |
| | Trickle current, formula | | I _{BAT} *100u*R _{PRE-TERM} / 1 | | | mA |
| TERMINATION – SET BY PRE-TERM terminal | | | | | | |
| Terminal | Termination Threshold Current, default setting | V _{BAT} > V _{RCH} ; R _{ISET} = 1kΩ; R _{PRE-TERM} = High Z | 9 | 12 | 14 | %I _{BAT-CC} |
| | Termination Current Threshold Formula | | (I _{BAT} *50u*R _{PRE-TERM} / 1)+10 | | | mA |
| I _{PRE-TERM} | Current for programming the term. and Trickle with resistor. I _{Term-Start} is the initial PRE-TERM current. | R _{PRE-TERM} = 2kΩ, V _{BAT} = 4.15V | 45 | 50 | 55 | μA |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

| RECHARGE OR REFRESH | | | | | | |
|---------------------------------------|--|---|--------------------------------|---------------------------------|--------------------------------|----|
| V _{RCH} | Recharge detection threshold – Normal Temp | V _{IN} = 5V, V _{TS} = 0.5V, V _{BAT} : 4.25V → V _{RCH} | V _{O(REG)} -0.2 | V _{O(REG)} -0.15 | V _{O(REG)} -0.1 | V |
| | Recharge detection threshold – Hot Temp | V _{IN} = 5V, 45°C <Temp<50°C, V _{BAT} : 4.15V → V _{RCH} | V _{O_HT(REG)} -0.2 | V _{O_HT(REG)} -0.15 | V _{O_HT(REG)} -0.1 | V |
| BATTERY-PACK NTC MONITOR; TS Terminal | | | | | | |
| I _{NTC-10k} | NTC bias current | V _{TS} = 0.3V | 48 | 50 | 52 | μA |
| V _{TTDM(TS)} | Termination and timer disable mode Threshold – Enter | V _{TS} : 1.5V → 4V; Timer Held in Reset | 3.6 | 3.7 | 3.8 | V |
| V _{HYS-TTDM(TS)} | Hysteresis | | | 100 | | mV |
| V _{CLAMP(TS)} | TS maximum voltage clamp | V _{TS} = Open (Float) | | V _{IN} | | V |
| V _{TS-0°C} | Low temperature CHG Pending | Low Temp Charging to Pending; V _{TS} : 1V → 1.5V | 1.384 | | | V |
| V _{HYS-0°C} | Hysteresis at 0°C | Charge pending to low temp charging; V _{TS} : 1.5V → 1V | | 60 | | mV |
| V _{TS-10°C} | Low temperature, half charge | Normal charging to low temp charging; V _{TS} : 0.5V → 1V | | 920 | | mV |
| V _{HYS-10°C} | Hysteresis at 10°C | Low temp charging to normal CHG; V _{TS} : 1V → 0.5V | | 20 | | mV |
| V _{TS-45°C} | High temperature at 4.1V | Normal charging to high temp CHG; V _{TS} : 0.5V → 0.2V | | | 246.8 | mV |
| V _{HYS-45°C} | Hysteresis at 45°C | High temp charging to normal CHG; V _{TS} : 0.2V → 0.5V | | 10 | | mV |
| V _{TS-50°C} | High temperature Disable | High temp charge to pending; V _{TS} : 0.2V → 0.1V | | | 209 | mV |
| V _{HYS-50°C} | Hysteresis at 50°C | Charge pending to high temp CHG; V _{TS} : 0.1V → 0.2V | | 10 | | mV |
| V _{TS-EN-10k} | Charge Enable Threshold, (10k NTC) | V _{TS} : 0V → 0.175V; | | 100 | | mV |
| V _{TS-DIS_HYS-10k} | HYS below V _{TS-EN-10k} to Disable, (10k NTC) | V _{TS} : 0.125V → 0V; | | 12 | | mV |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

| THERMAL REGULATION | | | | | | |
|--------------------------------------|---|--|-----|-----|-----|---------|
| $T_{J(REG)}$ | Temperature regulation limit | | | 135 | | °C |
| $T_{J(OFF)}$ | Thermal shutdown temperature | | | 155 | | °C |
| $T_{J(OFF-HYS)}$ | Thermal shutdown hysteresis | | | 20 | | °C |
| LOGIC LEVELS ON ISET2 | | | | | | |
| V_{IL} | Logic LOW input voltage | Sink 0.5 μ A | | | 0.5 | V |
| V_{IH} | Logic HIGH input voltage | Source 0.9 μ A | 2.5 | | | V |
| I_{IL} | Sink current required for LO | $V_{ISET2} = 0.5V$ | | 0.5 | | μ A |
| I_{IH} | Source current required for HI | $V_{ISET2} = 2.5V$ | | 0.9 | | μ A |
| V_{FLT} | ISET2 Float Voltage | | 1.1 | 1.5 | 1.9 | V |
| LOGIC LEVELS ON /CHG AND /PG | | | | | | |
| V_{OL} | Output LOW voltage | $I_{SINK} = 5mA$ | | | 0.4 | V |
| I_{LEAK} | Leakage current into IC | $V_{/CHG} = 5V, V_{/PG} = 5V$ | | | 1 | μ A |
| INPUT | | | | | | |
| $t_{DGL(PG_PWR)}$ | Deglitch time on exiting sleep. | Time measured from $V_{IN}: 0V \rightarrow 5V$ 1 μ s rise-time to /PG = Low, $V_{BAT} = 3.6V$ | | 0.5 | | ms |
| $t_{DGL(OVP-SET)}$ | Input over-voltage blanking time | $V_{IN}: 5V \rightarrow 12V$ | | 5 | | μ s |
| $t_{DGL(OVP-REC)}$ | Deglitch time exiting OVP | Time measured from $V_{IN}: 12V \rightarrow 5V$ 1 μ s fall-time to /PG = LO | | 100 | | μ s |
| TRICKLE CHARGE – SET BY PRE-TERM PIN | | | | | | |
| $t_{DGL1(LOWV)}$ | Deglitch time on Trickle current to constant current transition | | | 70 | | μ s |
| $t_{DGL2(LOWV)}$ | Deglitch time on constant current to trickle current transition | | | 32 | | ms |
| $t_{DGL(TERM)}$ | Deglitch time, termination detected | | | 30 | | ms |
| RECHARGE OR REFRESH | | | | | | |
| $t_{DGL1(RCH)}$ | Deglitch time, recharge threshold detected | $V_{IN} = 5V, V_{TS} = 0.5V,$ $V_{BAT}: 4.25V \rightarrow 3.5V$ in 1 μ s; $t_{DGL(RCH)}$ is time to ISET ramp | | 29 | | ms |



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

| | | | | | | |
|---|---|--|-------|-------|-------|---------|
| $t_{DGL2(RCH)}$ | Deglitch time, recharge threshold detected in BAT-Detect Mode | $V_{IN} = 5V$, $V_{TS} = 0.5V$, $V_{BAT} = 3.5V$ inserted; $t_{DGL(RCH)}$ is time to ISET ramp | | 150 | | us |
| BATTERY CHARGING TIMERS AND FAULT TIMERS | | | | | | |
| $T_{TRICKLE-CHG}$ | Trickle safety timer value | Restarts when entering Trickle charge; Always enabled when in Trickle charge. | 1700 | 1940 | 2250 | s |
| t_{MAXCH} | Charge safety timer value | Clears fault or resets at UVLO, TS disable, BAT Short, exiting LOWV and Refresh | 34000 | 38800 | 45000 | s |
| BATTERY-PACK NTC MONITOR; TS Terminal | | | | | | |
| $t_{DGL(TTDM)}$ | Deglitch exit TTDM between states | | | 57 | | ms |
| | Deglitch enter TTDM between states | | | 400 | | μs |
| $t_{DGL(TS_{10^{\circ}C})}$ | Deglitch for TS thresholds: $10^{\circ}C$. | Normal to Cold Operation; $V_{TS}: 0.6V \rightarrow 1V$ | | 50 | | ms |
| | | Cold to Normal Operation; $V_{TS}: 1V \rightarrow 0.6V$ | | 20 | | ms |
| $t_{DGL(TS)}$ | Deglitch for TS thresholds: $0/45/50^{\circ}C$. | Battery charging | | 30 | | ms |

Specifications subject to change without notice.



DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

Detailed Description

Overview

The DIO5090X is an integrated 1A linear charger for 1-cell Li-Ion, Li-Polymer, targeted at space-limited portable applications. The device is powered by a USB port or AC adapter. High input voltage range with input overvoltage protection. The charger is designed for a single power path from the input to the output to charge a single cell Li-Ion or Li-Pol battery pack. Upon application of a 5VDC power source the ISET and BAT short checks are performed to assure a proper charge cycle.

The charger has three phases of charging: shifting the charging mode between the trickle charging, constant current charging and constant voltage charging mode. The charger also comes with a full set of safety features: JEITA Temperature Standard, Over-Voltage Protection, and Safety Timers. All of these features and more are described in detail below.

If the battery voltage is below the LOWV threshold, the battery is considered discharged and a preconditioning cycle begins. The amount of Trickle current can be programmed using the PRE-TERM terminal which programs a percent of constant charge current (10 to 40%) as the Trickle current. This feature is useful when the system load is connected across the battery "stealing" the battery current. The trickle current can be set higher to account for the system loading while allowing the battery to be properly conditioned. The PRE-TERM terminal is a dual function terminal which sets the trickle current level and the termination threshold level. The termination "current threshold" is always half of the trickle programmed current level.

Once the battery voltage has charged to the V_{LOWV} threshold, constant current charge is applied. The constant current is programmed using the ISET terminal. The constant current provides the bulk of the charge. Power dissipation in the IC is greatest in constant charge with a lower battery voltage. If the IC reaches 125°C the IC enters thermal regulation, slows the timer clock by half and reduce the charge current as needed to keep the temperature from rising any further.

Once the cell has charged to the regulation voltage the voltage loop takes control and holds the battery at the regulation voltage until the current tapers to the termination threshold. The termination can be disabled if desired. The /CHG terminal is low (LED on) during the charge cycle only and turns off once the termination threshold is reached, regardless if termination, for charge current, is enabled or disabled.

Power-Down or Under voltage Lockout (UVLO)

An internal under-voltage lockout circuit monitors the input voltage and keeps the charger in shutdown mode until VCC rises above the under-voltage lockout threshold. The UVLO circuit has a built-in hysteresis of 180mV. The DIO5090X is in power down mode if the IN terminal voltage is less than UVLO. The part is considered "dead" and all the terminals are high impedance.

Overvoltage-Protection (OVP) – Continuously Monitored

Additionally, an overvoltage protection (OVP) circuit is implemented that shuts off the internal LDO and discontinues charging when $V_{IN} > V_{OVP}$ for a period long than $t_{DGL(OVP)}$. Once the OVP condition is removed, a new power on sequence starts. The safety timers are reset and a new charge cycle will be indicated by the CHG output.



DIO5090X

Power-up

The IC is alive after the IN voltage ramps above UVLO (see sleep mode), resets all logic and timers, and starts to perform many of the continuous monitoring routines. Typically, the input voltage quickly rises through the UVLO and sleep states where the IC declares power good, starts the qualification charge at 100mA, sets the input current limit threshold base on the ISET2 terminal, starts the safety timer and enables the /CHG terminal.

Sleep Mode

If the IN terminal voltage is between than $V_{BAT}+V_{DT}$ and UVLO, the charge current is disabled, the safety timer counting stops (not reset) and the /PG and /CHG terminals are high impedance. As the input voltage rises and the charger exits sleep mode, the /PG terminal goes low, the safety timer continues to count, charge is enabled and the /CHG terminal returns to its previous state.

Power Good Indication (/PG)

PG PIN is an internal open drain FET output that becomes highly resistant when UVLO or OVP occurs in VIN and TS is disabled. The rest are low-resistivity output path to ground.

/CHG Terminal Indication

The charge terminal has an internal open drain FET which is on (pulls down to VSS) during the charge only (independent of TTDM) and is turned off once the battery reaches voltage regulation and the charge current tapers to the termination threshold set by the PRE-TERM resistor. The charge terminal is high impedance in sleep mode.

Cycling input power, pulling the TS terminal low and releasing or entering trickle-charge mode causes the /CHG terminal to go reset (go low if power is good and a discharged battery is attached) and is considered the start of charge.

/CHG and /PG LED Pull-up Source

For host monitoring, a pull-up resistor is used between the "STATUS" terminal and the VCC of the host and for a visual indication a resistor in series with an LED is connected between the "STATUS" terminal and a power source. The /CHG or /PG source is capable of exceeding 8V. If the source is the BAT terminal, note that as the battery changes voltage, and the brightness of the LEDs vary.

| Charging State | /CHG FET/LED |
|---|--------------|
| Charge after VIN applied | ON |
| Refresh Charge | |
| OVP | OFF |
| SLEEP | |
| V _{IN} Power Good State | /PG FET/LED |
| UVLO | OFF |
| SLEEP Mode | |
| OVP Mode | |
| TS_disable | |
| Normal Input ($V_{BAT} + V_{DT} < V_{IN} < V_{OUP}$) | ON |



DIO5090X

New Charge Cycle

A new charge cycle is started when a good power source is applied, performing a chip disable/enable (TS terminal), exiting Termination and Timer Disable Mode (TTDM), detecting a battery insertion or the BAT voltage drop terminal goes below the V_{RCH} threshold. The /CHG terminal is active low only during the charge cycle, therefore exiting TTDM or a drop terminal goes below V_{RCH} will not turn on the /CHG terminal FET, if the /CHG terminal is already high impedance.

IN-DPM (VIN-DPM or IN-DPM)

The IN-DPM feature is used to detect an input source voltage that is folding back (voltage drop terminal g), reaching its current limit due to excessive load. When the input voltage drops to the V_{IN-DPM} threshold the internal pass FET starts to reduce the current until there is no further drop in voltage at the input. This would prevent a source with voltage less than V_{IN-DPM} to power the BAT terminal. This works well with current limited adaptors and USB ports as long as the nominal voltage is 4.4V. This is an added safety feature that helps protect the source from excessive loads.

BAT

The Charger's BAT terminal provides current to the battery and to the system, if present. This IC can be used to charge the battery plus power the system, charge just the battery or just power the system (TTDM) assuming the loads do not exceed the available current. The BAT terminal is a current limited source and is inherently protected against shorts. If the system load ever exceeds the output programmed current threshold, the output will be discharged unless there is sufficient capacitance or a charged battery present to supplement the excessive load.

ISET

An external resistor is used to Program the Output Current (50 to 1000mA) and can be used as a current monitor.

$$I_{BAT} = (1V / R_{ISET}) * 450 \quad (1)$$

Where:

- I_{BAT} is the desired constant charge current

ISET2

Is a 3-state input and programs the Input Current Limit /Regulation Threshold. A low will program a regulated constant charge current via the ISET resistor and is the maximum allowed input/output current for any ISET2 setting, Float will program a 100mA Current limit and High will program a 500mA Current limit.

PRE_TERM – Trickle-Charge and Termination Programmable Threshold

Pre-Term is used to program both the Trickle-charge current and the termination current threshold. The trickle-charge current level is a factor of two higher than the termination current level. The termination can be set between 5 and 50% of the programmed output current level set by ISET. If left floating the termination and trickle are set internally at 10/20% respectively. The trickle-charge-to-constant-charge, V_{LOWV} threshold is set to 2.5V.

$$I_{Trickle} = (100\mu A * R_{PRE_TERM} / 1) * I_{BAT} \quad (2)$$

$$I_{TERM} = (50\mu A * R_{PRE_TERM} / 1) * I_{BAT} + 10mA \quad (3)$$



DIO5090X

Where:

- I_{TERM} is the termination current;
- $I_{Trickle}$ is the trickle current;
- R_{PRE_TERM} is trickle & terminal resistor.

TS


The TS function is designed to follow the new JEITA temperature standard for Li-Ion and Li-Pol batteries. There are now four thresholds 50°C, 45°C, 10°C, and 0°C.

For DIO5090A: Normal operation occurs between 10°C and 45°C. If between 0°C and 10°C the charge current level is $0.2 \cdot I_{BAT}$ and if between 45°C and 50°C the regulation voltage is reduced to $V_{BAT}-0.1V$ and the charge current level is cut in half. If less than 0°C or more than 50°C, the charging is disable.


For DIO5090B, D: Normal operation occurs between 10°C and 45°C. If between 0°C and 10°C the charge current level is $0.2 \cdot I_{BAT}$ and if less than 0°C or more than 45°C, the charging is disable.

The TS feature is implemented using an internal 50µA current source to bias the thermistor designed for use with a 10k NTC(recommend CN0402R103B3435FB from Sensicom Electronics Technology CO.) connected from the TS terminal to VSS. If this feature is not needed, a fixed 10kΩ can be placed between TS and VSS to allow normal operation. This may be done if the host is monitoring the thermistor and then the host would determine when to pull the TS terminal low to disable charge.

The TS terminal has two additional features, when the TS terminal is pulled low or floated/driven high. A low disables charge and a high puts the charger in TTDM.

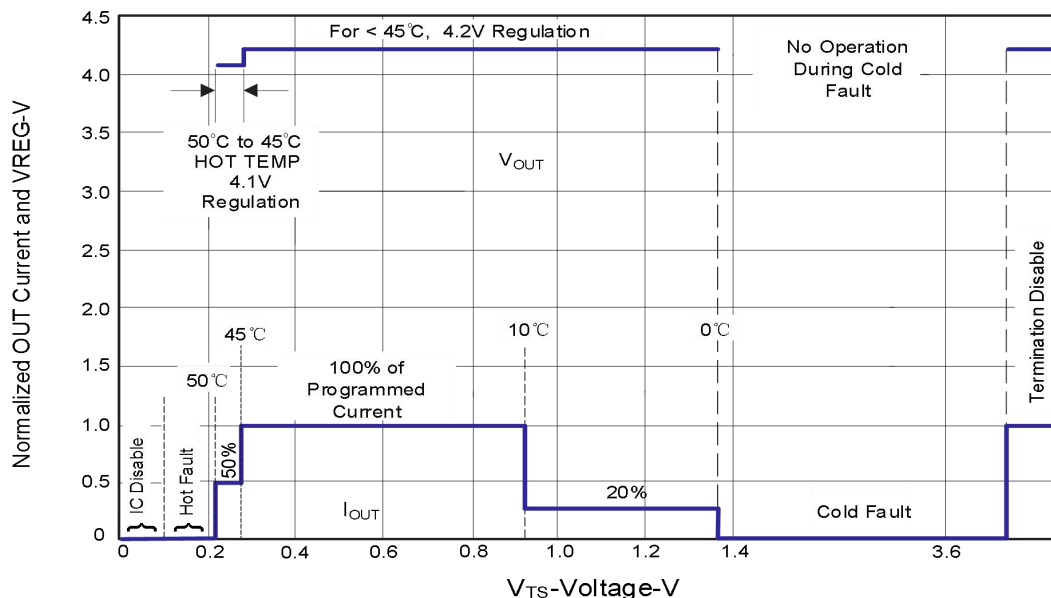

DIO5090A

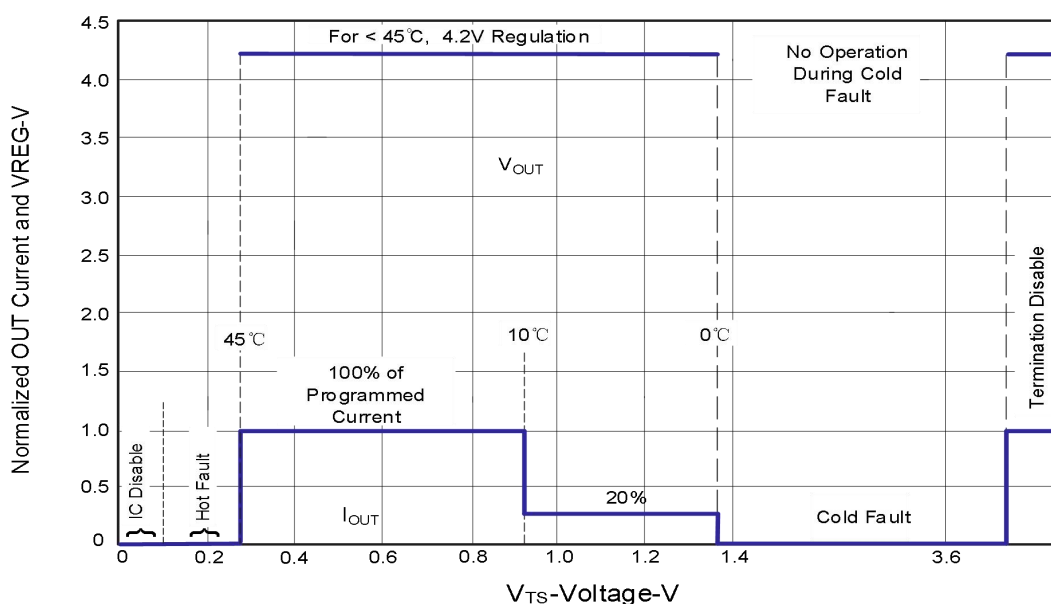

DIO5090D

Figure 2. Operation Over TS Bias Voltage

Termination and Timer Disable Mode (TTDM) - TS Terminal High

The battery charger is in TTDM when the TS terminal goes high from removing the thermistor (removing battery pack/ floating the TS terminal) or by pulling the TS terminal up to the TTDM threshold. When entering TTDM, the 10 hour safety timer is held in reset and termination is disabled. The charging profile does not change (still has trickle-charge, constant current charge and constant voltage modes). This implies the battery is still charged safely and the current is allowed to taper to zero.

Termination

Once the BAT terminal goes above V_{RCH} , (reaches voltage regulation) and the current tapers down to the termination threshold, the /CHG terminal goes high impedance. If the battery is present, the charge current will terminate. If the battery was removed along with the thermistor, then the TS terminal is driven high and the charge enters TTDM.

Refresh Threshold

After termination, if the BAT terminal voltage drops to V_{RCH} (150mV below regulation) then a new charge is initiated, but the /CHG terminal remains at a high impedance (off).

Timers

The trickle-charge timer is set to 30 minutes. The trickle-charge current, can be programmed to off-set any system load, making sure that the 30 minutes is adequate.

The constant charge timer is fixed at 10 hours and can be increased real time by going into thermal regulation, IN- DPM or if in USB current limit. The timer clock slows by a factor of 2, resulting in a clock than counts half as fast when in these modes. If either the 30 minute or ten hour timer times out, the charging is terminated and the /CHG terminal goes high impedance if not already in that state. The timer is reset by disabling the IC, cycling power or going into and out of TTDM.

Typical Applications

$I_{BAT_CONSTANT_CHG} = 500mA$; $I_{BAT_TRICKLE_CHG} = 100mA$; $I_{BAT_TERM} = 50mA$


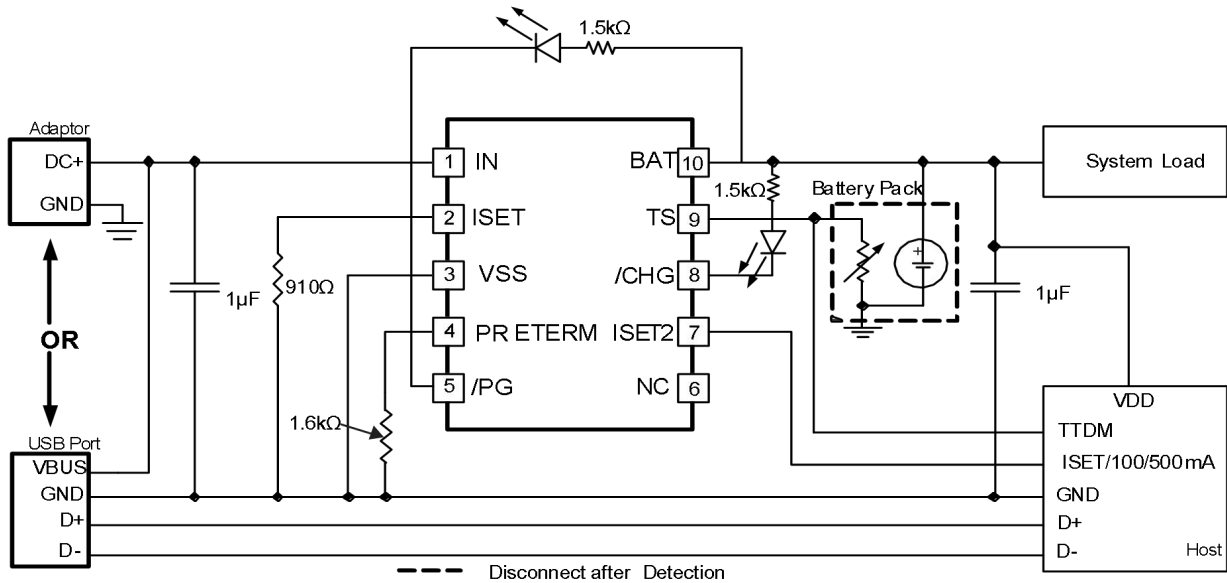


Figure 3. Typical Applications for DIO5090A/B

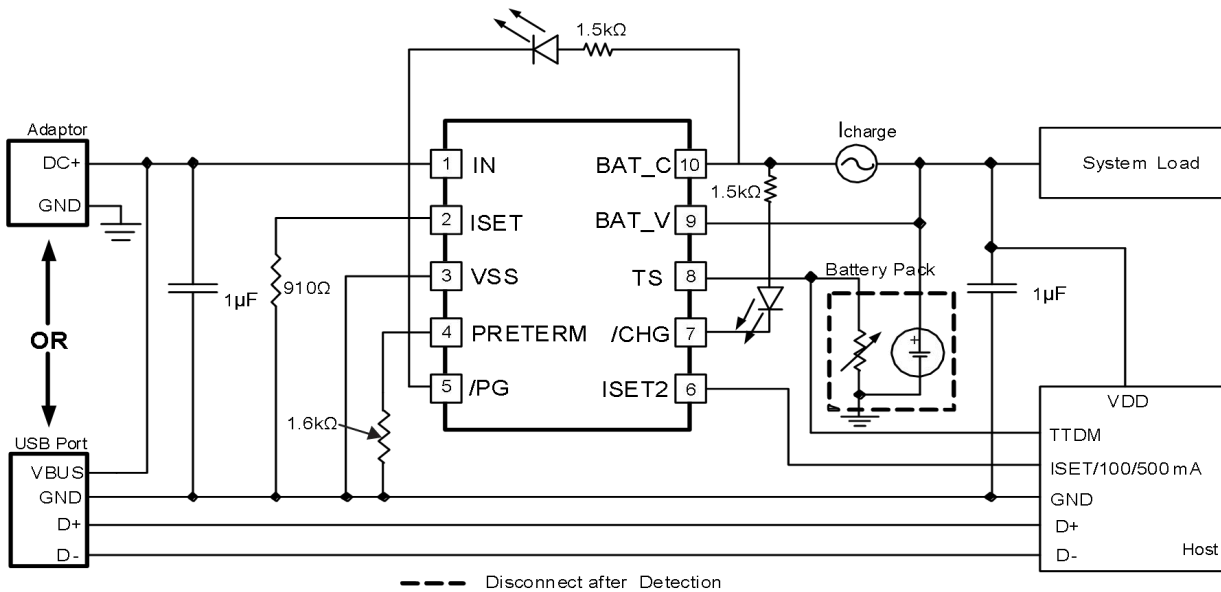

NOTE:

By separating the battery charging path and voltage sensing path, it allows battery fully charged eliminating the IR drop over the wires of the charging path.

Figure 4. Typical Applications for DIO5090D



DIO5090X

Design Requirements

- Supply voltage = 5V
- Constant charge current: $I_{BAT} = 500\text{mA}$; $I_{SET} \approx 910\Omega$
- Termination Current Threshold: $I_{TERM} = 50\text{mA}$; $I_{PRE-TERM} = 1.6\text{K}\Omega$
- Trickle-Charge Current by default is twice the termination Current or $\sim 100\text{mA}$
- TS – Battery Temperature Sense = 10k NTC ($\beta=3435$)
- Program the Constant Charge Current, I_{SET} :

$$R_{ISET} = [450 * 1V / I_{BAT}] \quad (4)$$

- Program the Termination Current Threshold, I_{TERM} :

$$R_{PRE_TERM} = (I_{Trickle} / I_{BAT}) * (1V / 100\mu A) \quad (5)$$

$$R_{PRE_TERM} = (I_{TERM} - 10\text{mA}) / (I_{BAT} * 50\mu A) \quad (6)$$

TS Function

Use a 10k NTC thermistor in the battery pack.

To Disable the temp sense function, use a fixed 10k resistor between the TS (terminal 1) and Vss.

/CHG and /PG

LED Status: connect a 1.5k resistor in series with a LED between the BAT terminal and the /CHG terminal. Connect a 1.5k resistor in series with a LED between the BAT terminal and the /PG terminal.

Processor Monitoring: Connect a pull-up resistor between the processor's power rail and the /CHG terminal. Connect a pull-up resistor between the processor's power rail and the /PG terminal.

Selecting IN and BAT Terminal Capacitors

In most applications, all that is needed is a high-frequency decoupling capacitor (ceramic) on the power terminal, input and output terminals. Using the values shown on the application diagram, is recommended. After evaluation of these voltage signals with real system operational conditions, one can determine if capacitance values can be adjusted toward the minimum recommended values (DC load application) or higher values for fast high amplitude pulsed load applications. Note if designed for high input voltage sources (bad adaptors or wrong adaptors), the capacitor needs to be rated appropriately. Ceramic capacitors are tested to 2x their rated values so a 16V capacitor may be adequate for a 30V transient (verify tested rating with capacitor manufacturer).

Thermal Package

The DIO5090X family is packaged in a thermally enhanced MSOP-10 package. The package includes a thermal pad to provide an effective thermal contact between the IC and the printed circuit board (PCB). The power pad should be directly connected to the VSS terminal. The most common measure of package thermal performance is thermal impedance (θ_{JA}) measured (or modeled) from the chip junction to the air surrounding the package surface (ambient). The mathematical expression for θ_{JA} is:

$$\theta_{JA} = (T_J - T) / P \quad (7)$$



DIO5090X

Where:

- T_J = chip junction temperature
- T = ambient temperature
- P = device power dissipation

Factors that can influence the measurement and calculation of θ_{JA} include:

1. Whether or not the device is board mounted
2. Trace size, composition, thickness, and geometry
3. Orientation of the device (horizontal or vertical)
4. Volume of the ambient air surrounding the device under test and airflow
5. Whether other surfaces are in close proximity to the device being tested

Due to the charge profile of Li-Ion and Li-Pol batteries the maximum power dissipation is typically seen at the beginning of the charge cycle when the battery voltage is at its lowest. Typically, after constant charge begins the pack voltage increases to $\approx 3.4V$ within the first 2 minutes. The thermal time constant of the assembly typically takes a few minutes to heat up so when doing maximum power dissipation calculations, 3.4V is a good minimum voltage to use. This is verified, with the system and a fully discharged battery, by plotting temperature on the bottom of the PCB under the IC (pad should have multiple vias), the charge current and the battery voltage as a function of time. The constant charge current will start to taper off if the part goes into thermal regulation.

Layout

To obtain optimal performance, the decoupling capacitor from IN to VSS (thermal pad) and the output filter capacitors from BAT to VSS (thermal pad) should be placed as close as possible to the DIO5090X, with short trace runs to both IN, BAT and VSS (thermal pad).

All low-current VSS connections should be kept separate from the high-current charge or discharge paths from the battery. Use a single-point ground technique incorporating both the small signal ground path and the power ground path.

The high current charge paths into IN terminal and from the BAT terminal must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces.

The DIO5090X family is packaged in a thermally enhanced MSOP-10 package. The package includes a thermal pad to provide an effective thermal contact between the IC and the printed circuit board (PCB); this thermal pad is also the main ground connection for the device. Connect the thermal pad to the PCB ground connection. It is best to use multiple 10mil vias in the power pad of the IC and close enough to conduct the heat to the bottom ground plane. The bottom ground plane should avoid traces that "cut off" the thermal path. The thinner the PCB the less temperature rise.

Typical Performance Characteristics

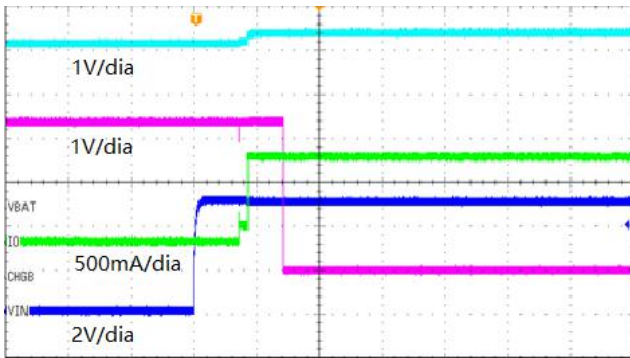


Figure 5. Power up

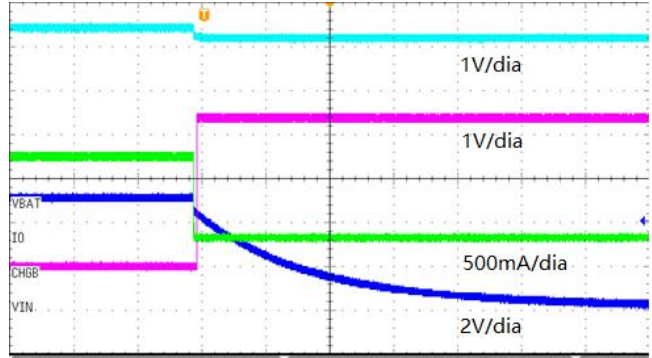


Figure 6. Power down

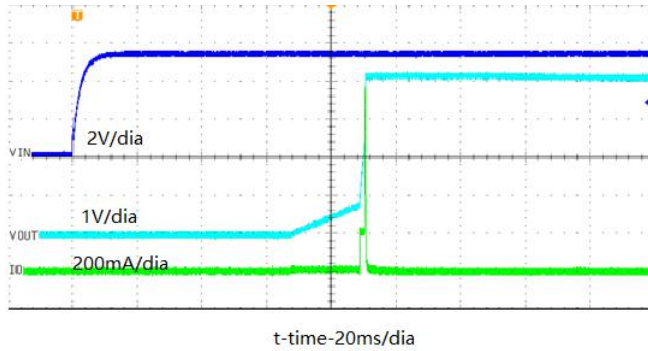


Figure 7. AC Charging

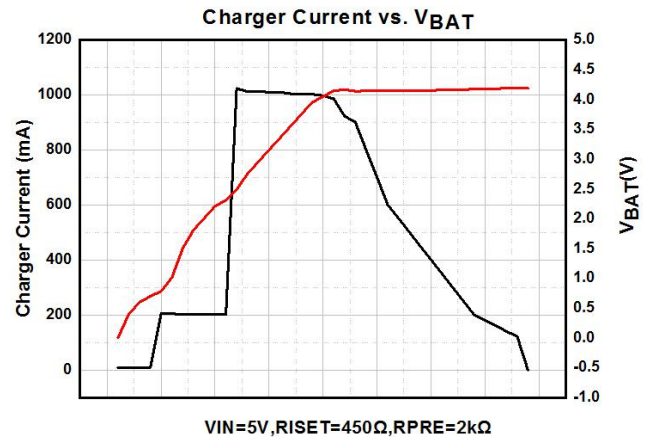


Figure 8. Charger Current vs. VBAT

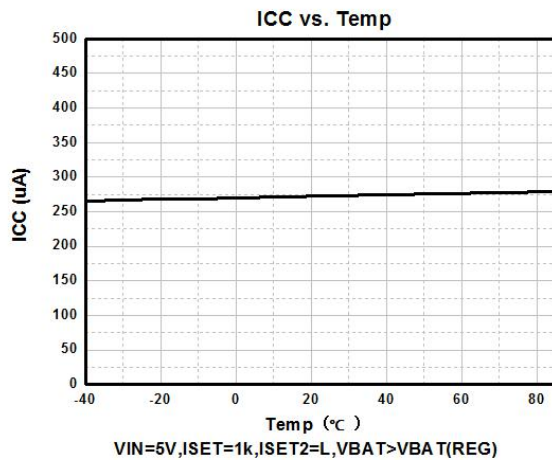


Figure 9. ICC vs. Temp

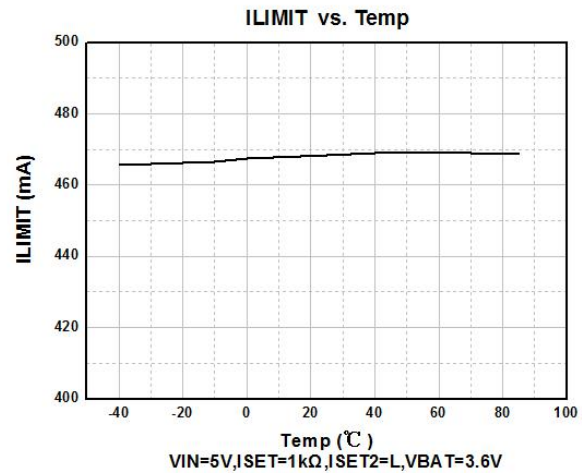


Figure 10. ILIMIT vs. Temp


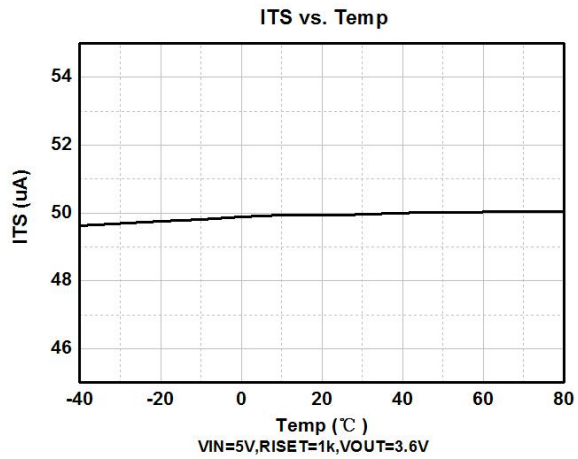


Figure 11. ITS vs. Temp

Physical Dimensions: EP-MSOP10



| Symbol | Min | Typ | Max |
|--------|---------|------|------|
| A | - | - | 1.10 |
| A1 | 0 | - | 0.15 |
| A2 | 0.75 | 0.85 | 0.95 |
| A3 | 0.25 | 0.35 | 0.39 |
| b | 0.18 | - | 0.27 |
| b1 | 0.17 | 0.20 | 0.23 |
| c | 0.15 | - | 0.20 |
| c1 | 0.14 | 0.15 | 0.16 |
| D | 2.90 | 3.00 | 3.10 |
| D1 | 0.75 | - | 2.50 |
| E | 4.70 | 4.90 | 5.10 |
| E1 | 2.90 | 3.00 | 3.10 |
| E2 | 0.75 | - | 2.50 |
| e | 0.40 | 0.50 | 0.60 |
| L | 0.40 | 0.60 | 0.80 |
| L1 | 0.95REF | | |
| L2 | 0.25BSC | | |
| R | 0.07 | - | - |
| R1 | 0.07 | - | - |
| θ | 0° | - | 8° |
| θ1 | 9° | 12° | 15° |

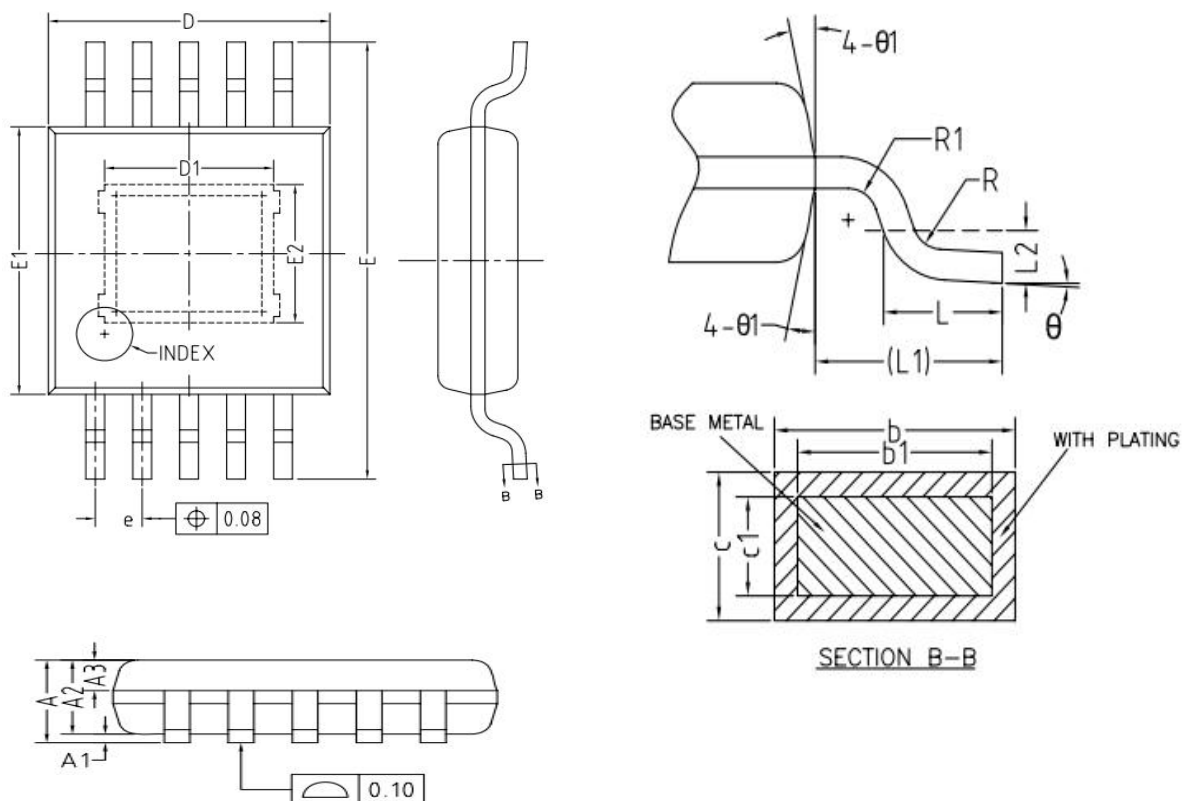

DIO5090X

1A, Single-Input, Single Cell Li-Ion and Li-Pol Battery Charger With Auto Start

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.