

DIO20491

4μA, Rail-to-Rail Input/ Output Low Power Amplifier

Features

- Ultra low power: 4μA
- Unity gain stable
- Gain bandwidth product: 150kHz
- Wide supply range: 1.8V to 5.5V
- Available in SOT23-5, DFN2*2-6 packages
- Temperature range:
 - Industrial: -40°C to 85°C
 - Extended: -40°C to 125°C


Descriptions

DIO20491 is an ultra low power operational amplifier. DIO20491 has a gain-bandwidth product of 150kHz, wide operating supply voltage from 1.8V to 5.5V and broad output voltage swing.

DIO20491 consumes ultra low power, with 4μA bias current, which makes DIO20491 can be ideal for battery powered device, temperature-sense device, etc.

The DIO20491 operational amplifier is available in single configuration. All types of amplifiers are fully specified over the extended -40°C to 125°C temperature range.

Typical Applications

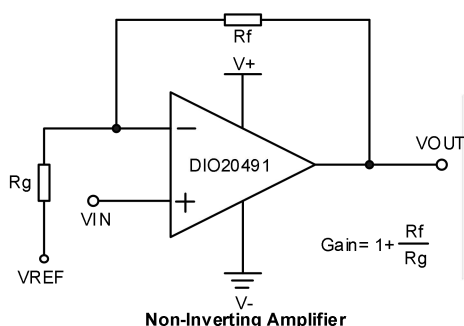


Applications

- Portable Equipment
- Active Filters
- Data Acquisition
- Portable Equipment
- Test Equipment
- Broadband Communication
- Process Control
- Audio and Video Processing


Ordering Information

Order Part Number	Top Marking		T _A	Package	
DIO20491ST5	W921	Green or RoHS	-40°C to 125°C	SOT23-5	Tape & Reel, 3000
DIO20491DN6	DBV4	Green or RoHS	-40°C to 125°C	DFN2*2-6	Tape & Reel, 3000

Pin Assignments

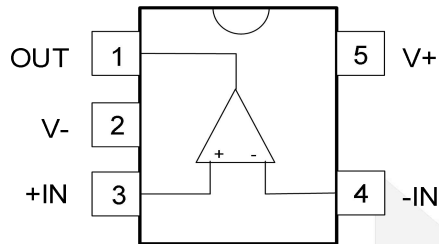

SOT23-5

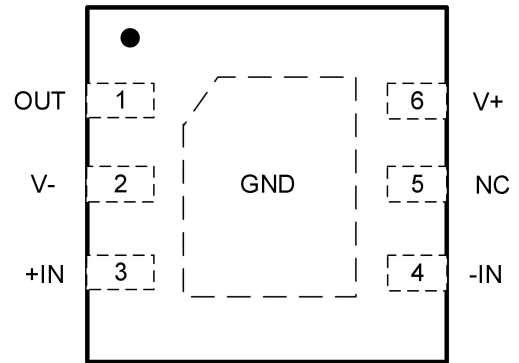

DFN2*2-6

Figure 1 Top View

Pin Description

Pin name	Description
V+	Positive supply
V-	Negative supply
+IN	Positive Input
-IN	Negative Input
OUT	Output
NC	No connect
GND(Exposed Pad)	Ground

Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter		Rating	Unit
Supply Voltage (V^+ – V^-)		7	V
Input Voltage		(V^-)-0.3V to (V^+)+0.3V	V
Difference Input Voltage		$ V^+ - V^- $	V
Storage Temperature Range		-65 to 150	°C
Junction Temperature		150	°C
Lead Temperature Range		260	°C
ESD	HBM, JEDEC: JESD22-A114	8	kV
	CDM, JEDEC: JESD22-C101	2	

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

Parameter		Rating	Unit
Supply Voltage		1.8 to 5.5	V
Input Voltage		0 to 5	V
Operating Temperature Range		-40 to 125	°C

Electrical Characteristics


Typical value: $V_+ = 5V$, $R_L = 100k\Omega$ to $V_+/2$, $V_{CM} = 1/2V_+$, $T_A = 25^\circ C$, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
INPUT CHARACTERISTICS						
V _{OS}	Input Offset Voltage	-40°C≤T _A ≤125°C, V ₊ =1.8V to 5.5V	-0.85		0.85	mV
I _B	Input Bias Current	V ₊ =1.8V to 5.5V		1		pA
I _{OS}	Input Offset Current	V ₊ =1.8V to 5.5V		1		pA
V _{CM}	Common Mode Voltage Range		-0.1		(V ₊) +0.1	V
CMRR	Common Mode Rejection Ratio	-40°C≤T _A ≤125°C,		130		dB
A _{OL}	Open Loop Voltage Gain	R _L =100kΩ, V _O = 0.1 to (V ₊)-0.1	70	105		dB
ΔV _{OS} /ΔT	Input Offset Voltage Drift	-40°C≤T _A ≤125°C		±5		μV/°C
OUTPUT CHARACTERISTICS						
V _{OH}	Output Voltage High	R _L =10kΩ, -40°C≤T _A ≤125°C		4.94		V
V _{OL}	Output Voltage Low	R _L =10kΩ, -40°C≤T _A ≤125°C		60		mV
I _{SC}	Output Short Circuit Current	Source I _{SC} , V ₊ =5V		24		mA
		Sink I _{SC} , V ₊ =5V		24		
POWER SUPPLY						
PSRR	Power Supply Rejection Ration		50			dB
I _Q	Supply Current	-40°C≤T _A ≤125°C		4		μA
DYNAMIC PERFORMANCE						
GBP	Gain Bandwidth Product	C _L =100pF		150		kHz
SR	Slew Rate	G=1, 2V Output Step		70		V/ms
t _s	Setting Time	G=1, 2V Output Step		20		μs
Θ _m	Phase Margin			60		Deg
tr	Overload Recovery Time			166		μs
NOISE PERFORMANCE						
THD	Total Harmonic Distortion	f=100Hz, 4V _{PP} , R _L =100kΩ,		0.09		%
e _n	Voltage Noise Density	f=1kHz		103		nV/√Hz


Specifications subject to change without notice.

Typical Performance Characteristics


Supply Current vs. Supply Voltage

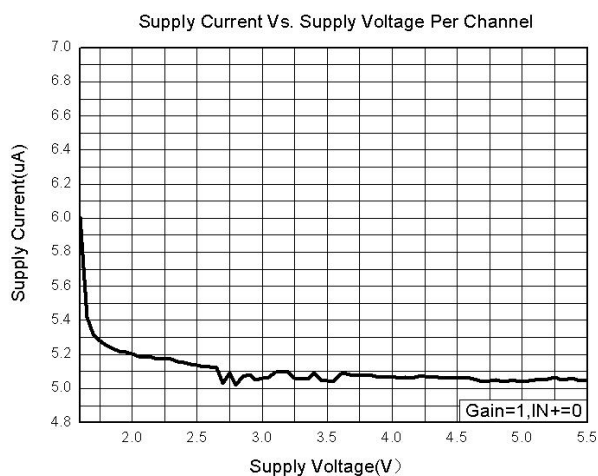


Supply Current vs. Temperature

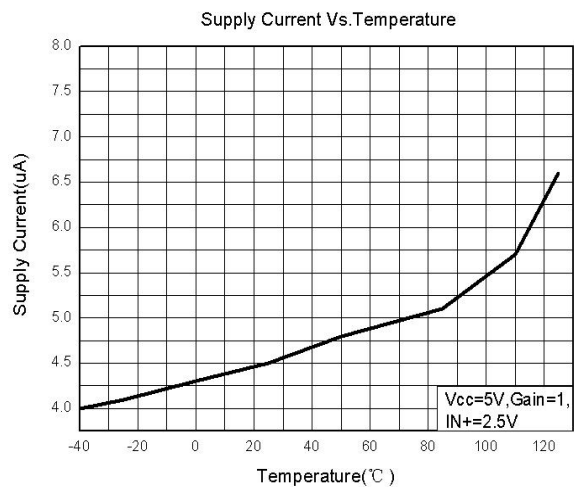


I_{SOURCE} vs. Output Voltage

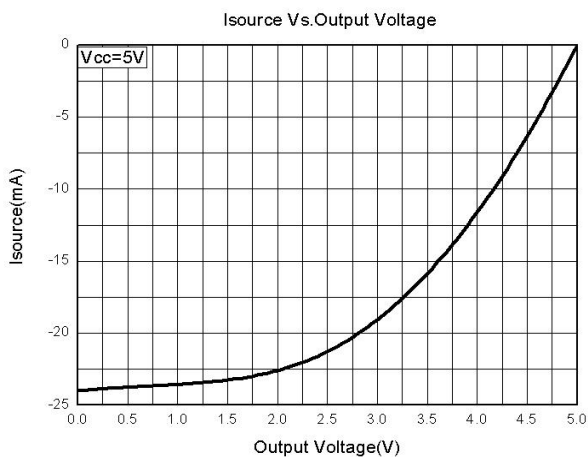


I_{SINK} vs. Output Voltage

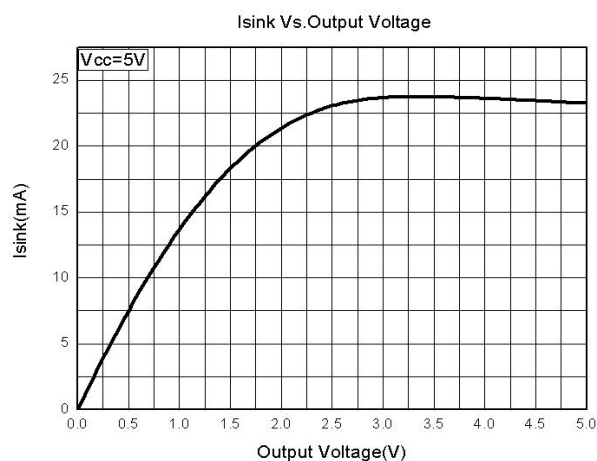


Gain vs. Frequency

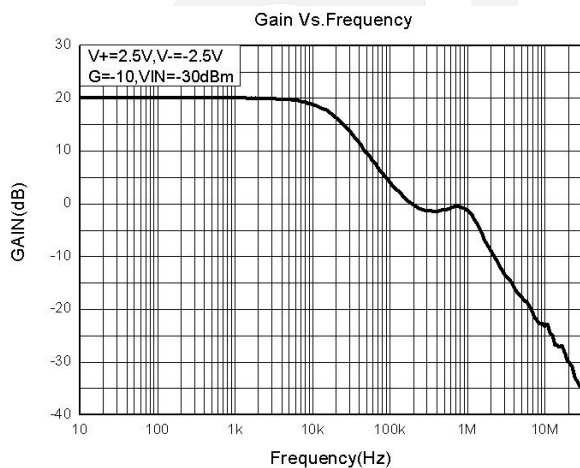


Input Offset Voltage vs. Temperature

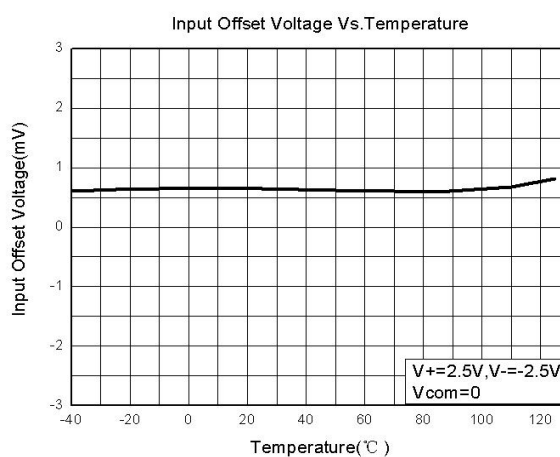


Input Offset Voltage vs. Supply Voltage

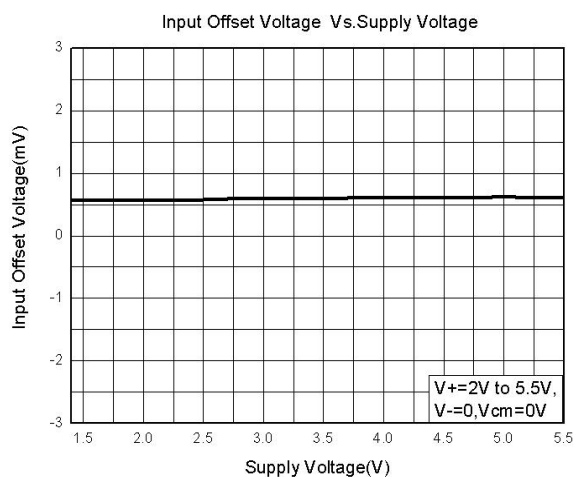


Small-Signal Response (V₊=5V, C_L=200pF)

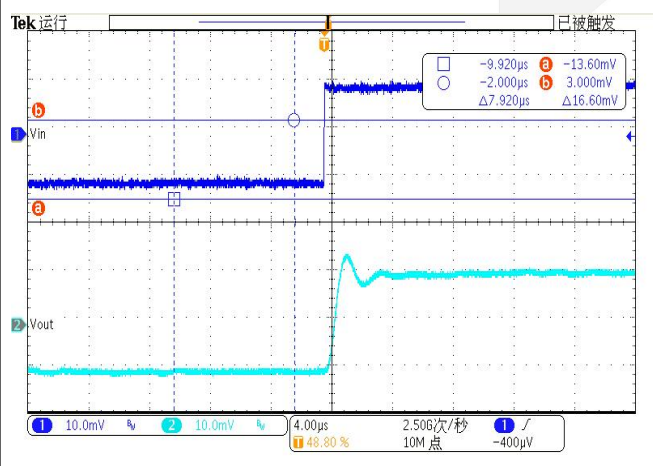




Small-Signal Response (V₊=5V, C_L=200pF)

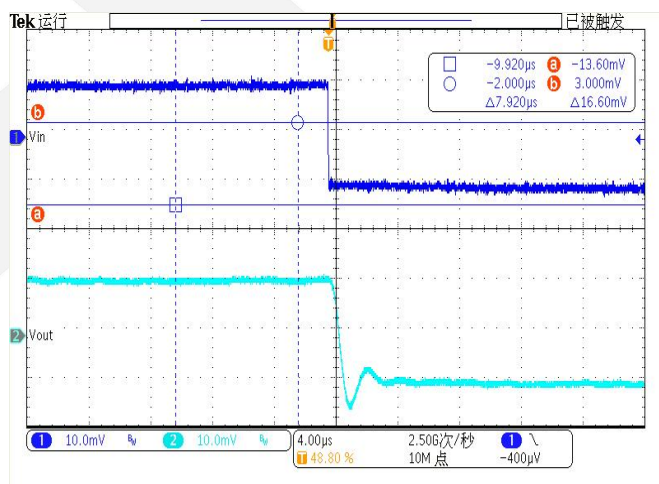

Large-Signal Response (V₊=5V, R_L=1M Ω)

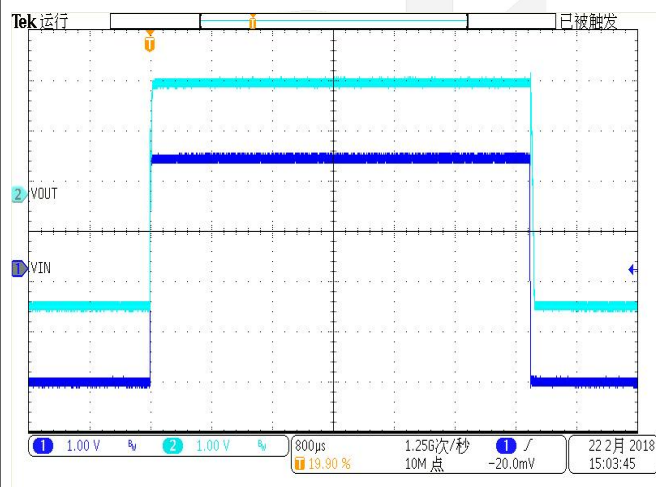



Physical Dimensions: SOT23-5

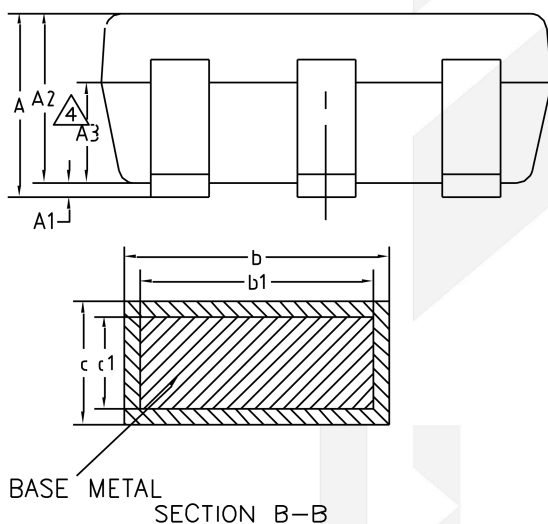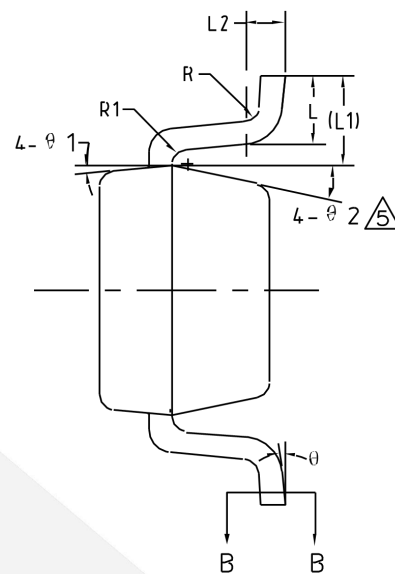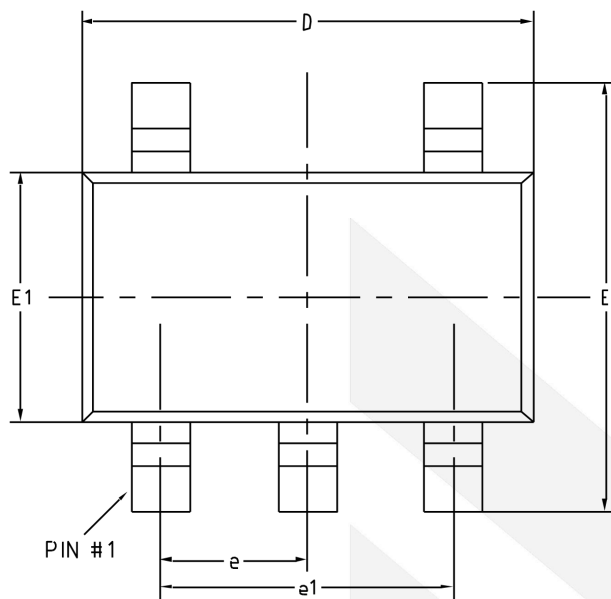

COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)			
Symbol	MIN	NOM	MAX
A	-	-	1.25
A1	0	-	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	-	0.50
b1	0.36	0.38	0.45
c	0.14	-	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	0.10	-	-
R1	0.10	-	0.25
θ	0°	-	8°
θ1	3°	5°	7°
θ2	6°	-	14°

4μA, Rail-to-Rail Input/ Output Low Power Amplifier

Physical Dimensions: DFN2*2-6

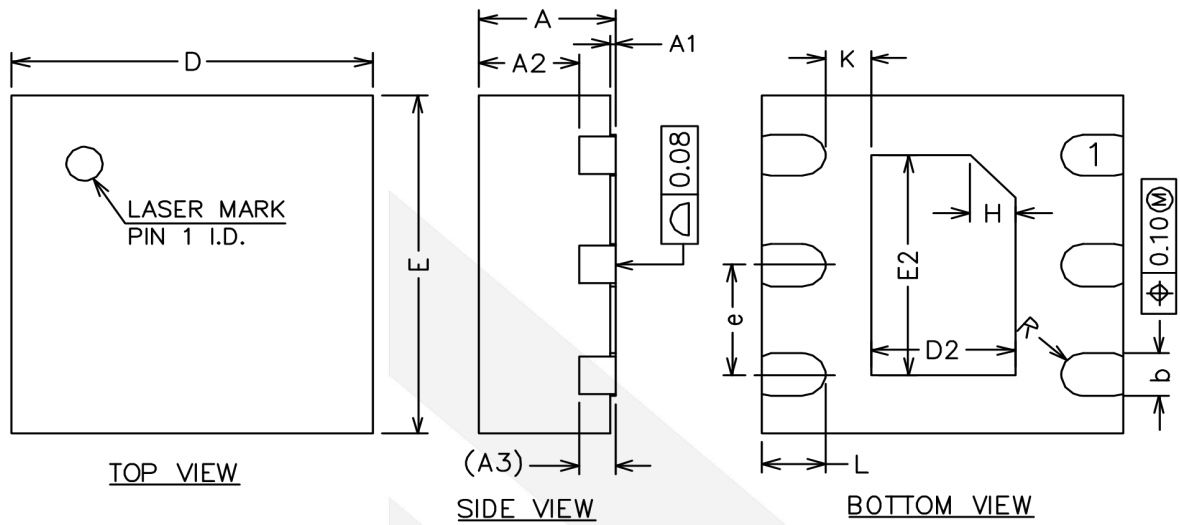

COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)			
Symbol	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.50	0.55	0.60
A3	0.20REF		
b	0.20	-	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.70	0.80	0.90
E2	1.20	1.40	1.60
e	0.55	0.65	0.75
H	0.20REF		
K	0.20	-	-
L	0.30	0.35	0.40
R	0.11	-	-

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.