

DIO7063

5.5V Low Loss Power Distribution Switch

Features

- Input voltage: 2.7V to 5.5V
- Typical 75mΩ on-resistance
- 0.9A Continuous Current Capability
- Enable polarity:
DIO7063A: Active high
DIO7063B: Active Low
- Under voltage lockout
- Over current protection, short circuit protection and over temperature protection
- Reverse blocking (no body diode)
- No reverse current when power ON or power OFF
- Compact SOT23-5 and MSOP-8 packages

Applications

- USB Ports/Hubs
- Digital TV
- Set-Top Boxes
- VOIP Phones


Descriptions

The DIO7063 power distribution switch is intended for applications where precision current limiting is required or heavy capacitive loads and short circuits are encountered. The power switch rising and falling times are controlled to minimize current surges during turning on/off. The DIO7063 provide 0.9A continuous current modes.

The DIO7063 device limits the output current under a safe level by using a constant current mode when the output load exceeds the current limit threshold.

The DIO7063 is available in the SOT23-5 and MSOP-8 packages. It is rated over the -40°C to +85°C temperature range.

Typical Application

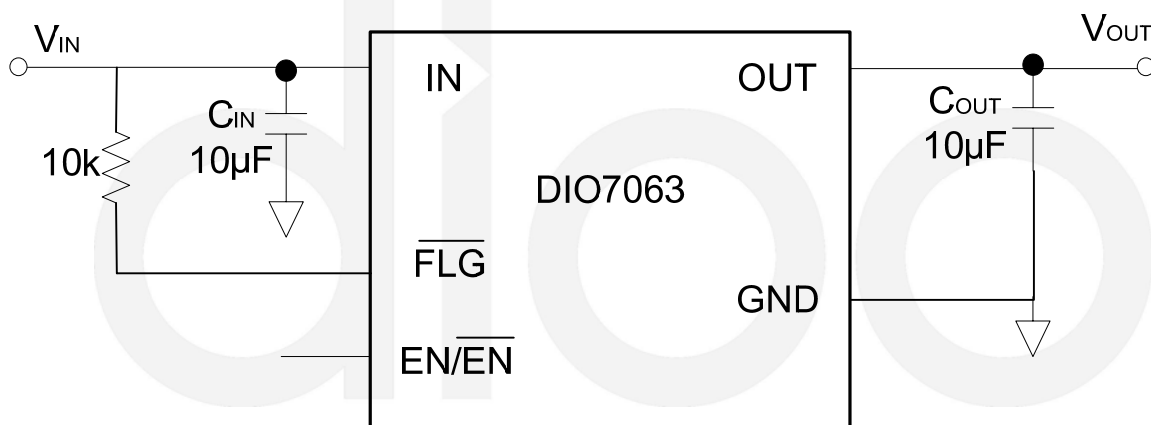



DIO7063

5.5V Low Loss Power Distribution Switch

Ordering Information

| Order Part Number | Top Marking | Recommended Continuous Current | | EN/EN | Package | |
|-------------------|-------------|--------------------------------|-------|-------------|---------|-------------------|
| DIO7063AST5 | YW6A | 900mA | Green | Active High | SOT23-5 | Tape & Reel, 3000 |
| DIO7063BST5 | YW6B | 900mA | Green | Active Low | SOT23-5 | Tape & Reel, 3000 |
| DIO7063AMP8 | D63A | 900mA | Green | Active High | MSOP-8 | Tape & Reel, 3000 |
| DIO7063BMP8 | D63B | 900mA | Green | Active Low | MSOP-8 | Tape & Reel, 3000 |

Ordering Information Complimentary Note

Ordering number = Part No. + Enable Active Version + Package Code

DIO7063

A: Enable Active High

B: Enable Active Low

ST5: Stands for SOT23-5

MP8: Stands for MSOP-8

Pin Assignments

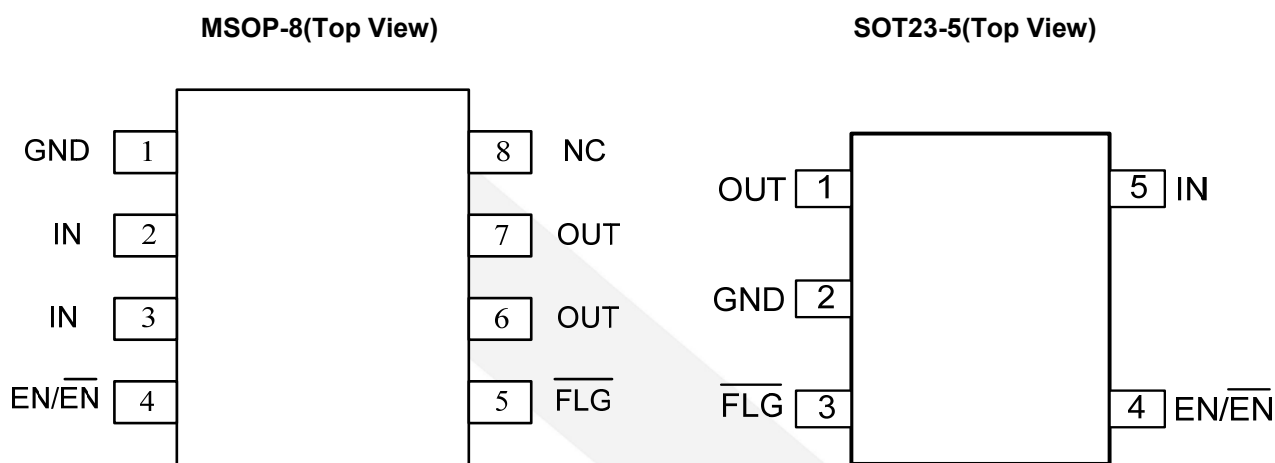


Figure 1 Pin Assignment

Pin Description

| Pin Name | Pin Description |
|----------------------------|--|
| OUT | Output pin, decoupled with a 10 μ F capacitor to GND |
| GND | Ground pin |
| $\overline{\text{FLG}}$ | Fault flag output |
| EN/ $\overline{\text{EN}}$ | Active high or Active low. Do not leave it floating |
| IN | Input pin, decoupled with a 10 μ F capacitor to GND |



DIO7063

5.5V Low Loss Power Distribution Switch

Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

| Parameter | | Rating | Unit |
|---|---------------------------|------------|------|
| All pins | | -0.3 to 6 | V |
| Package Thermal Resistance | θ_{JA} , SOT23-5 | 250 | °C/W |
| | θ_{JA} , MSOP-8 | 166 | |
| | θ_{JC} , SOT23-5 | 130 | |
| | θ_{JC} , MSOP-8 | 44 | |
| Junction Temperature Range | | 150 | °C |
| Lead Temperature (Soldering, 10 sec) | | 260 | °C |
| Storage Temperature Range (T_{STG}) | | -65 to 150 | °C |
| ESD Susceptibility | HBM (Human Body Mode) | 6 | kV |
| | CDM (Charged Device Mode) | 2 | |

Note: Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Parameter | Rating | Unit |
|----------------------------|------------|------|
| IN | 2.7 to 5.5 | V |
| All other pins | 0 to 5.5 | V |
| Junction Temperature Range | -40 to 125 | °C |
| Ambient Temperature Range | -40 to 85 | °C |



DIO7063


5.5V Low Loss Power Distribution Switch

Electrical Characteristics

$T_A = 25^\circ\text{C}$ $V_{IN} = 5\text{V}$, unless otherwise noted.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------------|-------------------------------|---|------|------|------|------------------|
| V_{IN} | Input Voltage Range | | 2.7 | | 5.5 | V |
| I_{SHDN} | Shut down Input Current | Open load, IC Disabled | | 0.2 | 1 | μA |
| I_Q | Quiescent Supply Current | | | 50 | | μA |
| $R_{DS(ON)}$ | FET R_{ON} | | | 75 | | m Ω |
| $V_{EN(H)}$ | EN Rising Threshold | Logic High Voltage | 2 | | | V |
| $V_{EN(L)}$ | EN Falling Threshold | Logic low Voltage | | | 0.8 | V |
| I_{EN} | EN Leakage Current | $V_{EN}=5.0\text{V}$ | | | 1 | μA |
| V_{IN_UVLO} | IN UVLO Threshold | | | | 2.5 | V |
| V_{IN_HYS} | IN UVLO Hysteresis | | | 240 | | mV |
| I_{LIM} | Over Current Limit | DIO7063A, DIO7063B | 1.05 | 1.3 | 1.65 | A |
| T_{ON} | Turn-on Time | $R_L=10\Omega$, $C_{OUT}=1\mu\text{F}$ | | 400 | | μs |
| T_{OFF} | Turn-off Time | $R_L=10\Omega$, $C_{OUT}=1\mu\text{F}$ | | 20 | | μs |
| T_{SD} | Thermal Shut down Temperature | | | 140 | | $^\circ\text{C}$ |
| | Thermal Shut down Hysteresis | | | 20 | | $^\circ\text{C}$ |

Block Diagram

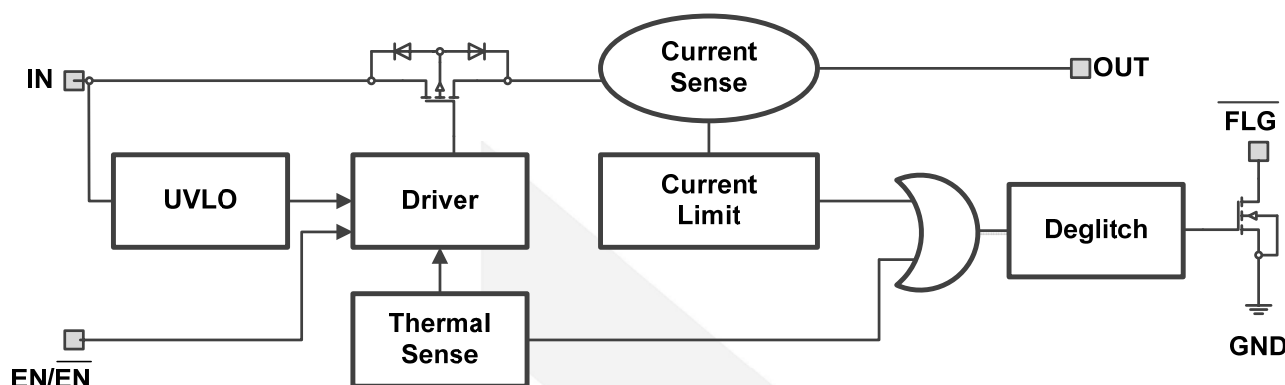

Application Information

Power Supply Considerations

A 10 μ F ceramic capacitor from V_{IN} to GND to prevent the input voltage from dropping during the hot-plug condition is strongly recommended. However higher capacitance could help reduce the voltage drop. Furthermore, bypassing the output with a 10 μ F ceramic capacitor improves the immunity of the device to short-circuit transients, because an output short will cause ringing on the input without the input capacitor. It could destroy the internal circuitry when the input transient voltage exceeds the absolute maximum supply voltage even for a short duration.

Under Voltage Lockout

A voltage sense circuit monitors the input voltage. When the input voltage is below approximately 2.4V, a control signal turns off the power switch.

Enable

The logic enable controls the power switch, the bias for the charge pump, driver, and other circuitry to reduce the supply current. The EN control pin must be driven to a logic high or logic low for a clearly defined signal input. Floating these control lines may cause unpredictable operation.

Over-Current Protection

The DIO7063 responds to over current conditions by limiting output current to the I_{LIM} levels. When an overcurrent condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. Complete shut down occurs only if the fault is present long enough to activate thermal limit.

Two possible overload conditions can occur. In the first condition, an excessive load occurs while the device is enabled. When the excessive load occurs, very high currents may flow for a short time before the current limit circuit can react. After the current limit circuit has tripped (reached the overcurrent trip threshold) the device switches into constant current mode to limit the current close to I_{LIM} .



DIO7063

In the second condition, the load is gradually increasing beyond the recommended operating current. The current is permitted to rise until the current limit threshold (I_{LIM}) is reached or until the thermal limit of the device is exceeded. The DIO7063 is capable of delivering current up to the current limit threshold (I_{LIM}) without damaging the device. Once the threshold has been reached, the device switches into its constant current mode.

Thermal Protection

Thermal protection prevents damage to the IC when heavy overload or short circuit conditions are present for extended periods of time. The conditions force the DIO7063 into constant current mode, and under short circuit conditions, the voltage across the switch is equal to the input voltage. The increased dissipation causes the junction temperature to rise to high levels. The protection circuit senses the junction temperature of the switch and shuts it off. Hysteresis is built into the thermal sense circuit, and after the device has cooled approximately 20 degrees, the switch turns back on. The switch continues to cycle in this way until the overload or input power is removed.

FLG Output

An error Flag is an open-drained output of an N-channel MOSFET. Flag output is pulled low when the below conditions happen: input under voltage lockout, output current limit, output short circuit and over temperature shut down. The flag response delay time is 5ms typically.



DIO7063

5.5V Low Loss Power Distribution Switch

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.