

DIO7004

5.5V Low Loss Power Distribution Switch

Features

- Input voltage: 2.7V to 5.5V
- Typical 75mΩ on-resistance
- Six different continuous current versions
- Under voltage lockout
- Over current protection, short circuit protection and over temperature protection
- Fault time 5ms typically with blanking
- Reverse blocking (no body diode)
- No reverse current when power ON or power OFF
- Enable polarity: active high or active low
- Quick Output Discharge
- DIO7004: available
- DIO7004N: not available
- Green SOT23-5, SOIC-8, EP-MSOP8 and MSOP-8 packages
- UL certification File No. E483954
- CB certification File No. DK-122853-UL

Descriptions

The DIO7004 power distribution switch is intended for applications where precision current limiting is required or heavy capacitive loads and short circuits are encountered. The power switch rising and falling times are controlled to minimize current surges during turning on/off.

The DIO7004A/B/C/D/E/W provide separately 350mA/700mA/1A/1.5A/2A/1.3A six current levels.


The DIO7004 device limits the output current under a safe level by using a constant current mode when the output load exceeds the current limit threshold.

The DIO7004 is available in the SOT23-5, SOIC-8, EP-MSOP8 and MSOP-8 packages. It is rated over the -40°C to 85°C temperature range.

Applications

- USB Ports/Hubs
- Digital TV
- Set-Top Boxes
- VOIP Phones

Typical Application

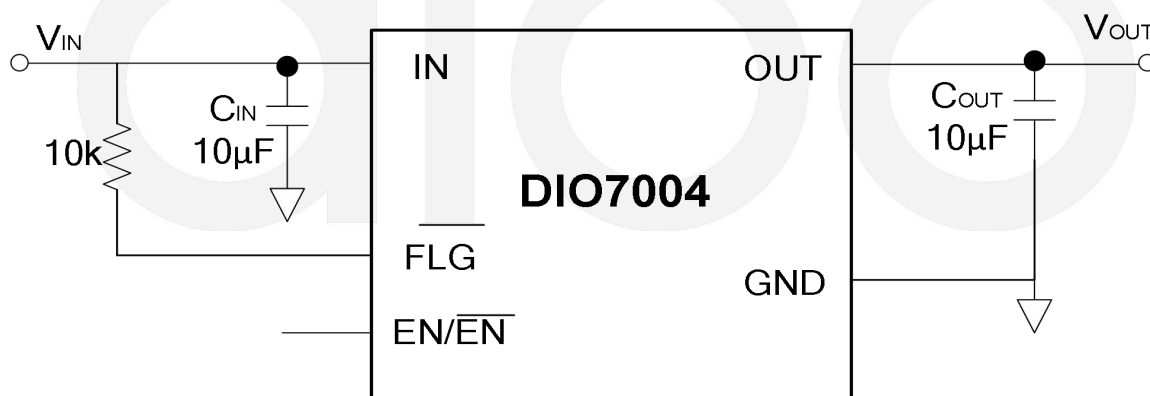



DIO7004

5.5V Low Loss Power Distribution Switch

Ordering Information

Order Part Number	Top Marking	Output Discharge Resistance		T _A	Package	
DIO7004abST5	4abW	Yes	Green	-40 to +85°C	SOT23-5	Tape & Reel, 3000
DIO7004NabST5	NabW	No	Green	-40 to +85°C	SOT23-5	Tape & Reel, 3000
DIO7004abSO8	D704ab	Yes	Green	-40 to +85°C	SOIC-8	Tape & Reel, 2500
DIO7004NabSO8	D70Nab	No	Green	-40 to +85°C	SOIC-8	Tape & Reel, 2500
DIO7004abXM8	D704ab	Yes	Green	-40 to +85°C	EP-MSOP8	Tape & Reel, 3000
DIO7004NabXM8	D70Nab	No	Green	-40 to +85°C	EP-MSOP8	Tape & Reel, 3000
DIO7004abMP8	D704ab	Yes	Green	-40 to +85°C	MSOP-8	Tape & Reel, 3000
DIO7004NabMP8	D70Nab	No	Green	-40 to +85°C	MSOP-8	Tape & Reel, 3000

Ordering Information Complimentary Note

Ordering number = Part No. + a: Enable Active Version + b: Continuous Current Version + Package Code

DIO7004
DIO7004N

H: Enable Active High
L: Enable Active Low

ST5: Stands for SOT23-5
SO8: Stands for SOIC-8
XM8: Stands for EP-MSOP8
MP8: Stands for MSOP-8

A: 350mA Continuous Current Version
B: 700mA Continuous Current Version
C: 1A Continuous Current Version
D: 1.5A Continuous Current Version
E: 2A Continuous Current Version
W: 1.3A Continuous Current Version

Pin Assignments

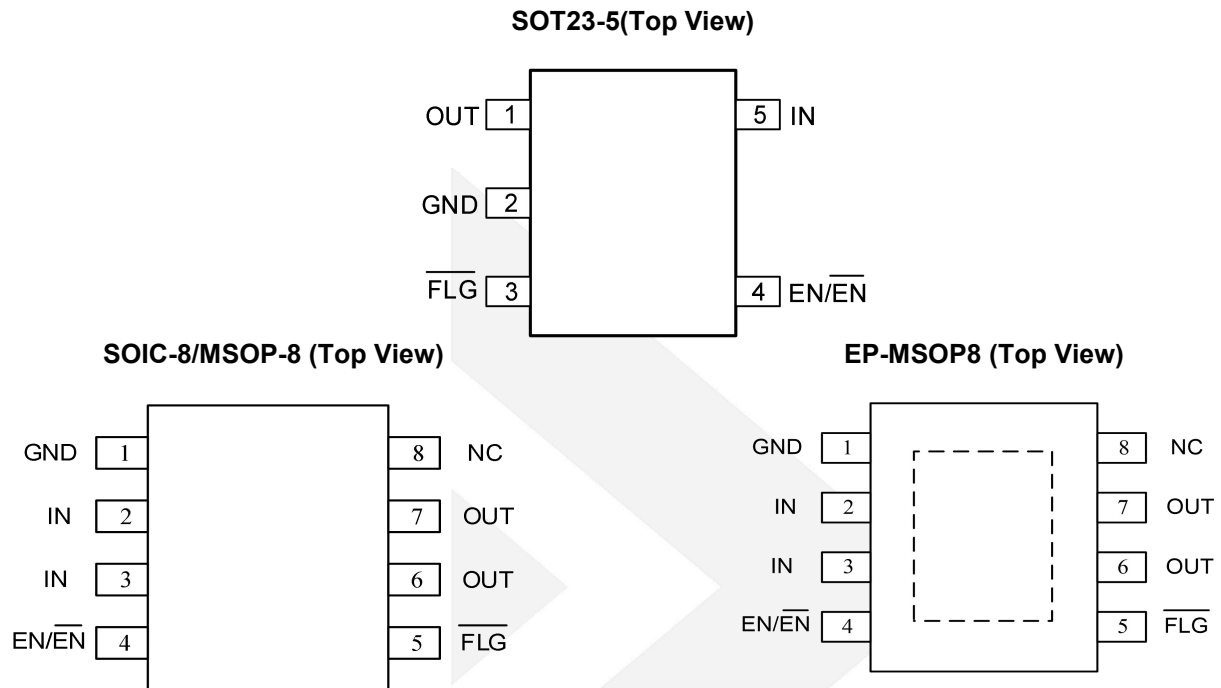


Figure 1 Pin Assignment

Pin Description

Pin Name	Pin Description
OUT	Output pin, decoupled with a 10μF capacitor to GND
GND	Ground pin
FLG	Fault flag output
EN/EN	Active high or Active low. Do not leave it floating
IN	Input pin, decoupled with a 10μF capacitor to GND



DIO7004

5.5V Low Loss Power Distribution Switch

Absolute Maximum Ratings

Stresses beyond those listed under the Absolute Maximum Rating table may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter		Rating	Unit
All pins		-0.3 to 6	V
Package Thermal Resistance	θ_{JA} , SOT23-5	250	°C/W
	θ_{JA} , SOIC-8	130	
	θ_{JA} , EP-MSOP8	100	
	θ_{JA} , MSOP-8	166	
Junction Temperature Range		150	°C
Lead Temperature (Soldering, 10 sec)		260	°C
Storage Temperature Range (T_{STG})		-65 to 150	°C
ESD Susceptibility	HBM (Human Body Mode)	6	kV
	CDM (Charged Device Mode)	2	

Note: Input and output negative ratings may be exceeded if input and output diode current ratings are observed.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to absolute maximum ratings.

Parameter		Rating	Unit
IN		2.7 to 5.5	V
All other pins		0 to 5.5	V
Junction Temperature Range		-40 to 125	°C
Ambient Temperature Range		-40 to 85	°C



DIO7004


5.5V Low Loss Power Distribution Switch

Electrical Characteristics

T_A=25°C, V_{IN} = 5V, unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage Range		2.7		5.5	V
I _{SHDN}	Shut down Input Current	Open load, IC Disabled		0.2	1	μA
I _Q	Quiescent Supply Current	Open load, IC Enabled		50	88	μA
R _{DS(ON)}	FET R _{ON}	I _{OUT} =100mA		75	99	mΩ
V _{EN(H)}	EN Rising Threshold	V _{IN} = 2.7V to 5.5V	1.4			V
V _{EN(L)}	EN Falling Threshold	V _{IN} = 4.5V to 5.5V			0.6	V
		V _{IN} = 2.7V to 4.5V			0.5	
I _{EN}	EN Leakage Current	V _{EN} =5.0V			1	μA
V _{IN_UVLO}	IN UVLO Threshold				2.5	V
V _{IN_HYS}	IN UVLO Hysteresis			240	400	mV
I _{LIM}	Current Limit	DIO7004 - A	0.375	0.5	0.625	A
		DIO7004 - B	0.75	1	1.25	
		DIO7004 - C	1.1	1.5	1.9	
		DIO7004 - D	1.5	2	2.5	
		DIO7004 - E	2.1	2.5	3.1	
		DIO7004 - W	1.05	1.275	1.5	
I _{SHORT}	Short-Circuit Current Limit	Enabled, Output short to ground		30%		I _{LIM}
T _{ON}	Turn-on Time	R _L =10Ω, C _{OUT} =1μF		400		μs
T _{OFF}	Turn-off Time	R _L =10Ω, C _{OUT} =1μF		20		μs
T _{SD}	Thermal Shut down Temperature			140		°C
	Thermal Shut down Hysteresis			20		°C

Block Diagram

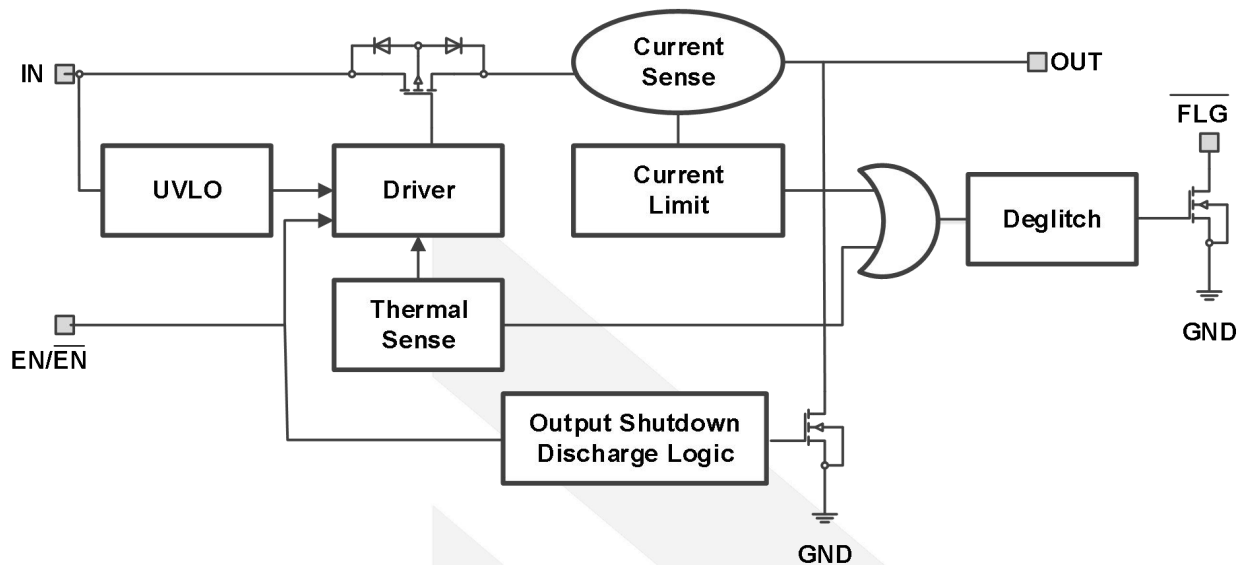

Application Information

Power Supply Considerations

A 10 μ F ceramic capacitor from V_{IN} to GND to prevent the input voltage from dropping during the hot-plug condition is strongly recommended. However higher capacitance could help reduce the voltage drop. Furthermore, bypassing the output with a 10 μ F ceramic capacitor improves the immunity of the device to short-circuit transients, because an output short will cause ringing on the input without the input capacitor. It could destroy the internal circuitry when the input transient voltage exceeds the absolute maximum supply voltage even for a short duration.

Under Voltage Lockout

A voltage sense circuit monitors the input voltage. When the input voltage is below approximately 2.4V, a control signal turns off the power switch.

Enable

The logic enable controls the power switch, the bias for the charge pump, driver, and other circuitry to reduce the supply current. The EN control pin must be driven to a logic high or logic low for a clearly defined signal input. Floating these control lines may cause unpredictable operation.

Over-Current Protection

The DIO7004 responds to over current conditions by limiting output current to the I_{LIM} levels. When an over current condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. Complete shut down occurs only if the fault is present long enough to activate thermal limit.

Three possible overload conditions can occur. In the first condition, the output has been shorted to GND before the device is enabled or before V_{IN} has been applied. The DIO7004 senses the short circuit and immediately clamps output current to a certain safe level.

In the second condition, an excessive load occurs while the device is enabled. When the excessive load occurs, very high currents may flow for a short time before the current limit circuit can react. After the current limit circuit



DIO7004

has tripped (reached the overcurrent trip threshold) the device switches into constant current mode to limit the current close to I_{LIM} .

In the third condition the load is gradually increasing beyond the recommended operating current. The current is permitted to rise until the current limit threshold (I_{LIM}) is reached or until the thermal limit of the device is exceeded. The DIO7004 is capable of delivering current up to the current limit threshold (I_{LIM}) without damaging the device. Once the threshold has been reached, the device switches into its constant current mode.

Thermal Protection

Thermal protection prevents damage to the IC when heavy overload or short circuit conditions are present for extended periods of time. The conditions force the DIO7004 into constant current mode, and under short circuit conditions, the voltage across the switch is equal to the input voltage. The increased dissipation causes the junction temperature to rise to high levels. The protection circuit senses the junction temperature of the switch and shuts it off. Hysteresis is built into the thermal sense circuit, and after the device has cooled approximately 20 degrees, the switch turns back on. The switch continues to cycle in this way until the overload or input power is removed.

Reverse-voltage Protection

The reverse-voltage protection feature turns off the P-channel MOSFET whenever the output voltage exceeds the input voltage by 175mV (typ) for 4ms (typ). A reverse current of $(V_{OUT}-V_{IN})/R_{DS(on)}$ will be present when this occurs. This prevents damage to devices on the input side of the DIO7004 by preventing significant current from sinking into the input capacitance. The DIO7004 devices allow the P-channel MOSFET to turn on once the output voltage goes below the input voltage for the same 4ms deglitch time.

FLG Output

An error Flag is an open-drained output of an N-channel MOSFET. Flag output is pulled low when the below conditions happen: input under voltage lockout, output current limit, output short circuit and over temperature shut down. The flag response delay time is 5ms typically.





DIO7004


5.5V Low Loss Power Distribution Switch

Typical Performance Characteristics


$T_A=25^{\circ}\text{C}$, $V_{IN}=5\text{V}$, unless otherwise noted.

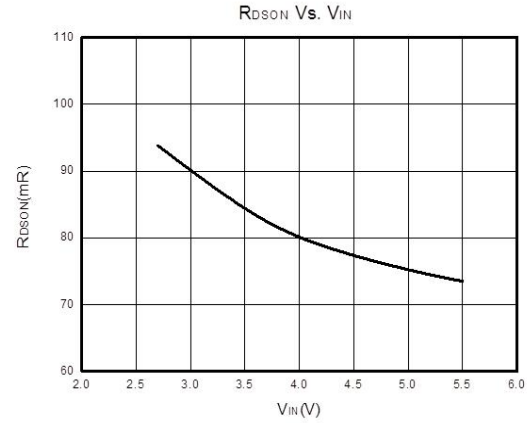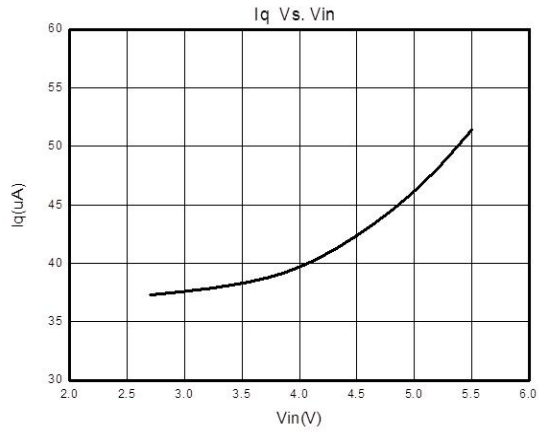


Current Limit

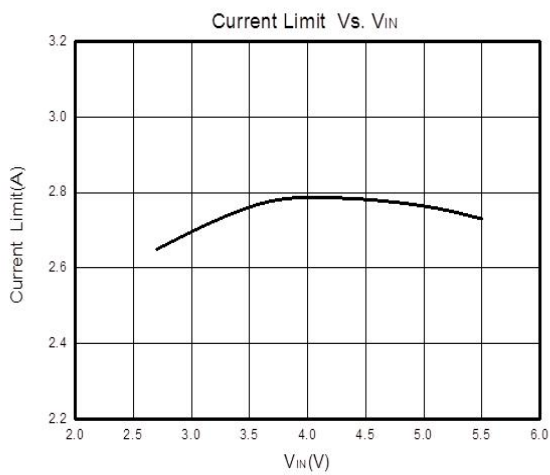


Output Short Response

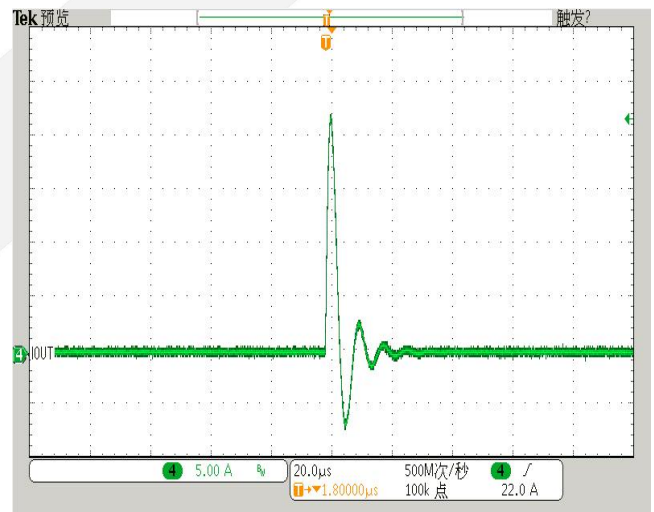


EN Turn On for DIO7004HC (I_{load}=0.7A, V_{in}=5V, R=7ohm)

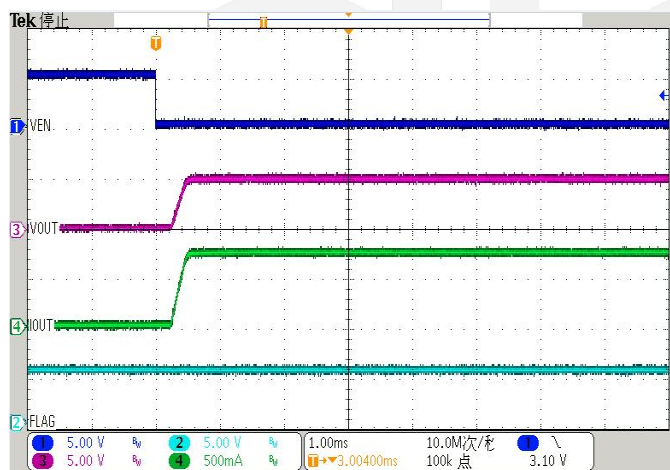


EN Turn Off for DIO7004HC (I_{load}=0.7A, V_{in}=5V, R=7ohm)

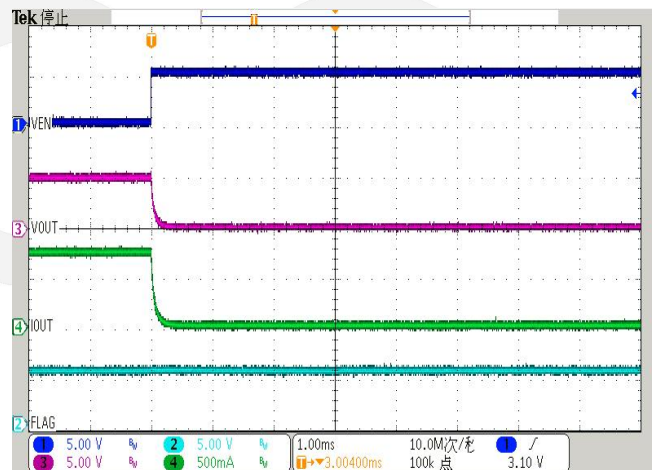


UVLO Turn On for DIO7004HC
(Iload=0.7A, Vin=5V, R=7ohm)

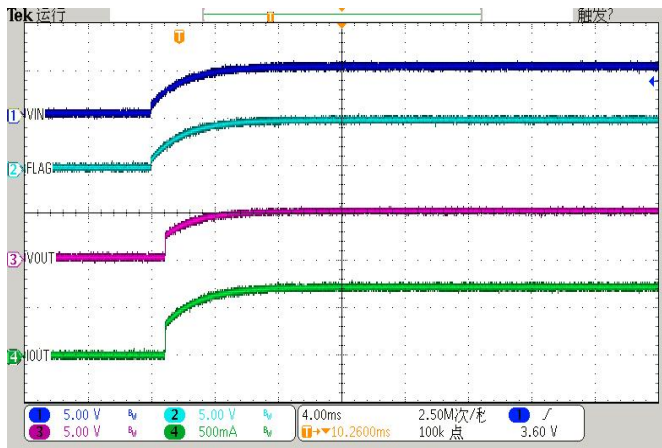


UVLO Turn Off for DIO7004HC
(Iload=0.7A, Vin=5V, R=7ohm)

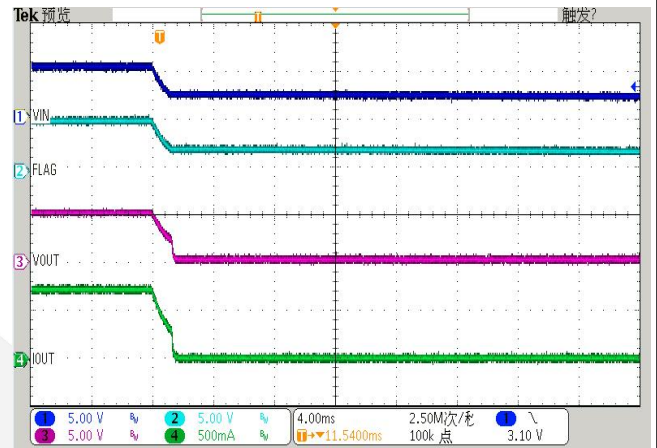


No-Load to Over-Load Transient Response
for DIO7004HC
(Vin=5V, R=1ohm)

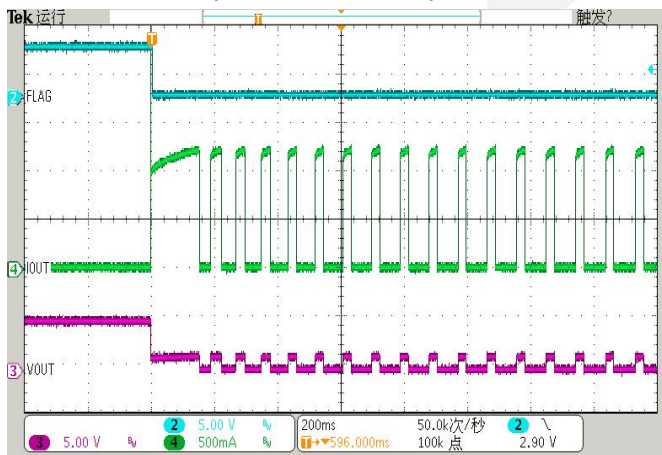


Over-Load to No-Load Recovery Response
for DIO7004HC
(Vin=5V, R=1ohm)

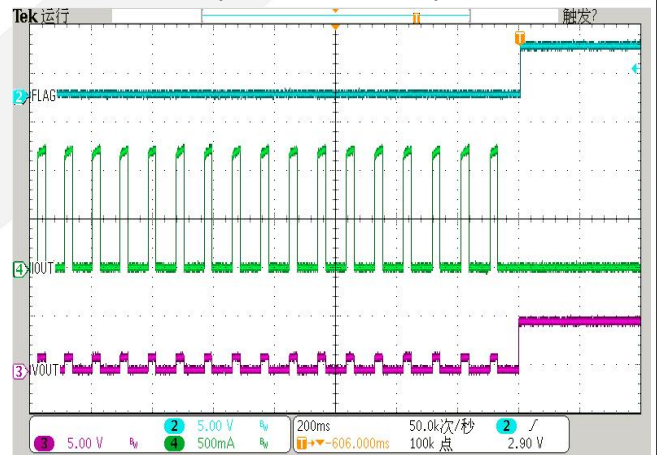

Full-Load to Short-Circuit Transient Response
for DIO7004HC
(Iload=0.7A, Vin=5V)

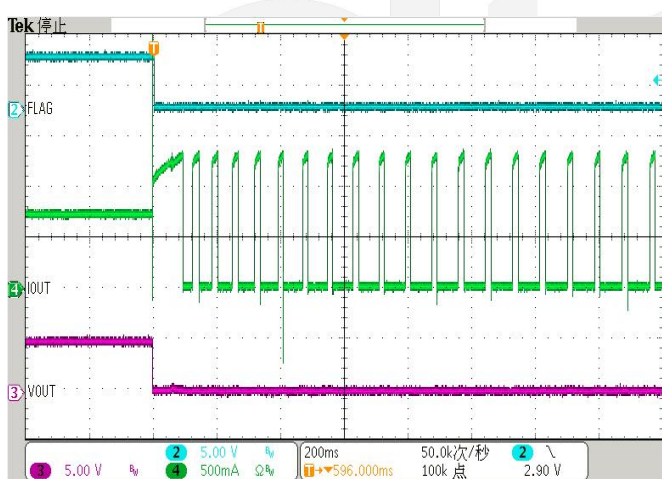

Short-Circuit to Full-Load Recovery Response
for DIO7004HC
(Iload=0.7A, Vin=5V)

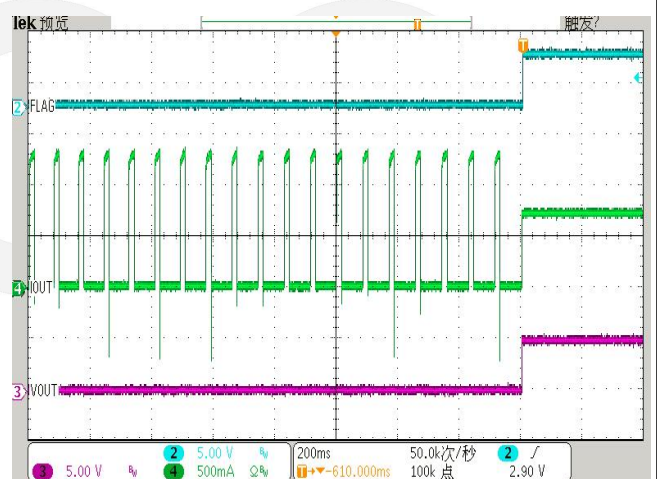





DIO7004

5.5V Low Loss Power Distribution Switch

No-Load to Short-Circuit Transient Response
for DIO7004HC
(Vin=5V)

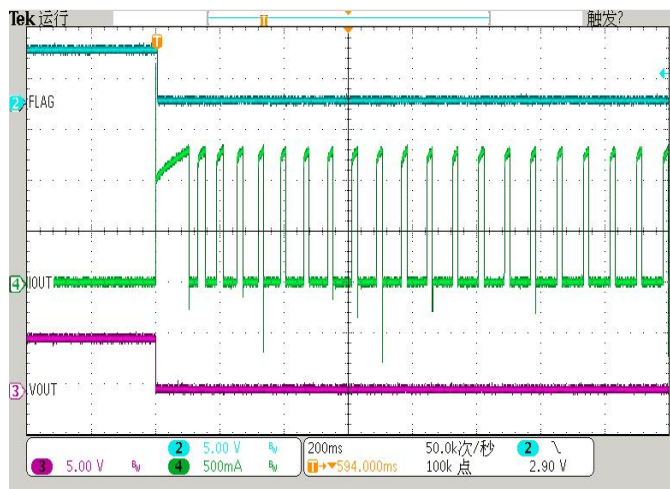

Short-Circuit to No-Load Recovery Response
for DIO7004HC
(Vin=5V)

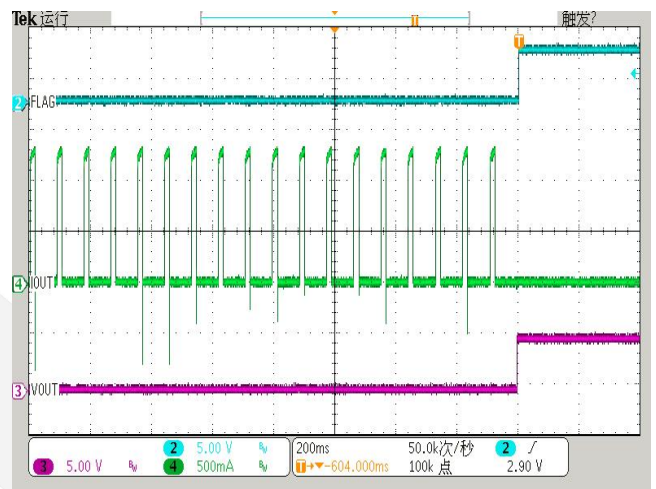

dioo



DIO7004

5.5V Low Loss Power Distribution Switch

CONTACT US

Dioo is a professional design and sales corporation for high-quality performance analog semiconductors. The company focuses on industry markets, such as cell phones, handheld products, laptops, medical equipment, and so on. Dioo's product families include analog signal processing and amplifying, LED drivers, and charger ICs. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information or full datasheet, please contact our sales department or representatives.

dioo