

## DIO2352XE

### Ultra Low Vos, 2.5kHz, RRIO CMOS High-Precision Amplifier

#### Features

- Rail-to-Rail Input and Output
- Low offset ( $V_{os}$ ):  $\pm 13\mu V$
- Gain Error:  $\pm 1\%$
- Input offset drift:  $0.01\mu V/{^\circ}C$ (Max)
- Gain drift:  $10ppm/{^\circ}C$ (Max)
- Gain Selection:
  - DIO2352AE: 50V/V
  - DIO2352BE: 100V/V
- Wide supply range: 2.5V to 5.5V
- Single Supply Operation
- Quiescent Current: 730 $\mu A$ (Typ)
- Available Packages: SOIC-8, TSSOP-8, DFN-8

#### Applications


- Notebook Computer
- Mobile Phone
- Power Management IC
- Battery Charger
- Welding Equipment

#### Descriptions

The DIO2352XE is an ultra-low offset voltage rail-to-rail input and output voltage feedback amplifier. They have a wide input common-mode voltage range and output voltage swing, and take the operating supply voltage is from 2.5 to 5.5V.

The DIO2352XE features an offset voltage of only  $13\mu V$  and drift of  $0.01\mu V/{^\circ}C$ , which makes the product perfect in applications of intolerant errors. Temperature/position/pressure sensors and medical equipment can benefit greatly from nearly zero drift over their operating temperature range.

#### Typical Application

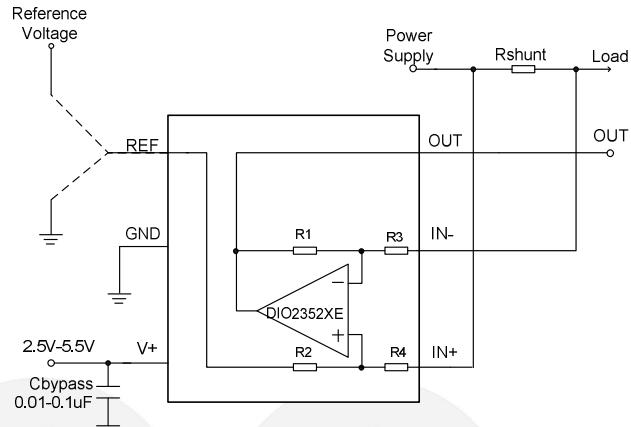


#### Ordering Information

Order Part Number	Top Marking		$T_A$	Package	
DIO2352AES08	DIO2352A	Green/RoHS	-40 to +125°C	SOIC-8	Tape & Reel, 2500
DIO2352BES08	DIO2352B	Green/RoHS	-40 to +125°C	SOIC-8	Tape & Reel, 2500
DIO2352AETP8	DIO2352A	Green/RoHS	-40 to +125°C	TSSOP-8	Tape & Reel, 3000
DIO2352BETP8	DIO2352B	Green/RoHS	-40 to +125°C	TSSOP-8	Tape & Reel, 3000
DIO2352AEED8	23A	Green/RoHS	-40 to +125°C	DFN-8	Tape & Reel, 3000
DIO2352BEED8	23B	Green/RoHS	-40 to +125°C	DFN-8	Tape & Reel, 3000

## Pin Assignments

SOIC-8/TSSOP-8

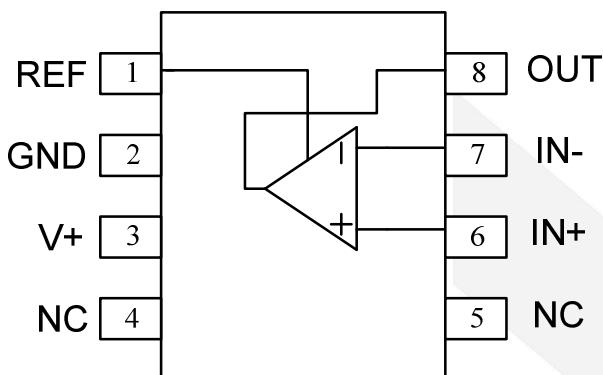

DFN-8

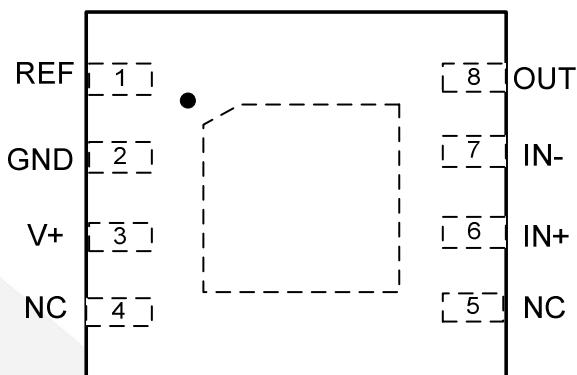


Figure 1 Pin Assignment

## Pin Description

Pin name	Description
V+	Positive supply
GND	Negative supply
IN+	Positive Input
IN-	Negative Input
OUT	Output
REF	Reference Input
NC	No connect



## Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Rating" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Parameter	Rating	Unit
Supply Voltage	7.5	V
Input Voltage	(-Vs)-0.5 to (+Vs) +0.5V	V
Storage Temperature Range	-65 to 150	°C
Junction Temperature	150	°C
Lead Temperature Range	260	°C
ESD	8	kV
CDM, JEDEC: JESD22-C101	2	

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation to ensure optimal performance to the datasheet specifications. DIOO does not recommend exceeding them or designing to Absolute Maximum Ratings.

Parameter	Rating	Unit
Supply Voltage	2.5 to 5.5	V
Input Voltage	0 to 5	V
Operating Temperature Range	-40 to 125	°C



# DIO2352XE

## Electrical Characteristics

V<sub>+</sub>=+5V, V<sub>REF</sub>=V<sub>S</sub>/2, T<sub>A</sub> = 25°C, unless otherwise specified.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
INPUT CHARACTERISTICS						
V <sub>CM</sub>	Common Mode Input Current		-0.1		(V <sub>+</sub> )+0.1	V
CMRR	Common Mode Rejection Ratio	V <sub>CM</sub> =-0.1 to (V <sub>+</sub> )+0.1		100		dB
V <sub>os</sub>	Input Offset Voltage	Common voltage=V <sub>S</sub>	-70	30	+70	μV
		Common voltage=V <sub>S</sub> /2	-18	13	18	
PSRR	Power Supply Rejection Ration	V <sub>S</sub> =2.7V to 5.5V		100		dB
I <sub>B</sub>	Input Bias Current			5		μA
I <sub>os</sub>	Input Offset Current			20		pA
ΔV <sub>os</sub> /ΔT	Input Offset Voltage Drift	-40°C≤T <sub>A</sub> ≤125°C		0.01		μV/°C
	Gain Drift			3	10	ppm/°C
Gain		DIO2352AE		50		V/V
		DIO2352BE		100		V/V
A <sub>OL</sub>	Open Loop Voltage Gain	R <sub>L</sub> =10kΩ, V <sub>O</sub> = 0.1 to (V <sub>+</sub> )-0.1		150		dB
OUTPUT CHARACTERISTICS						
V <sub>OH</sub>	Output Voltage High	R <sub>L</sub> =100kΩ, -40°C≤T <sub>A</sub> ≤125°C		4.998		V
		R <sub>L</sub> =10kΩ, -40°C≤T <sub>A</sub> ≤125°C		4.99		
V <sub>OL</sub>	Output Voltage Low	R <sub>L</sub> =100kΩ, -40°C≤T <sub>A</sub> ≤125°C		1.2		mV
		R <sub>L</sub> =10kΩ, -40°C≤T <sub>A</sub> ≤125°C		7.3		
I <sub>O</sub>	Output Current	Source Current		50		mA
		Sink Current		50		
I <sub>S</sub>	Supply Current	-40°C≤T <sub>A</sub> ≤125°C		730		μA
GBP	Gain Bandwidth Product			2.5		kHz
NOISE PERFORMANCE						
THD	Total Harmonic Distortion	f=1kHz, 2V Output Step, R <sub>L</sub> =10kΩ,		0.0014		%
e <sub>n</sub>	Voltage Noise Density	f=1kHz		40		nV/kHz


Specifications subject to change without notice.

Ultra Low V<sub>os</sub>, 2.5kHz, RRIO CMOS High-Precision Amplifier


## Typical Performance Characteristics

$V_+ = +5V$ ,  $V_{REF} = V_S/2$ ,  $T_A = 25^\circ C$ , unless otherwise specified.


### Supply Voltage & Current

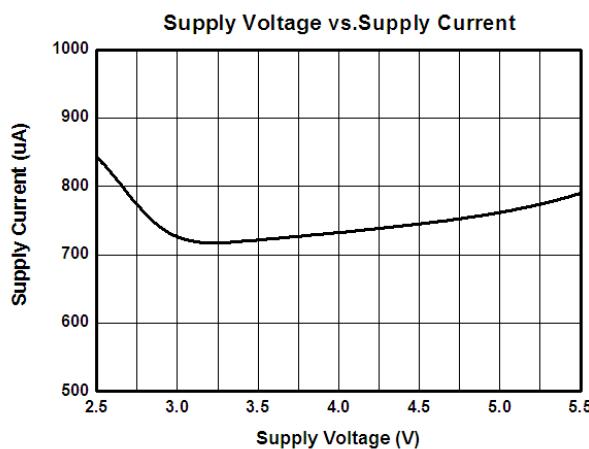


### ICC & Temperature

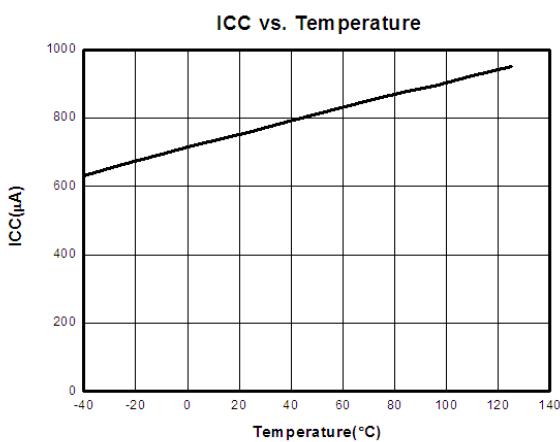


### GBW & Frequency

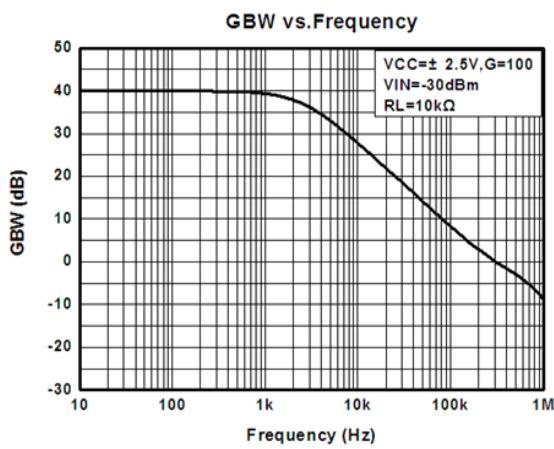


### CMRR & Frequency

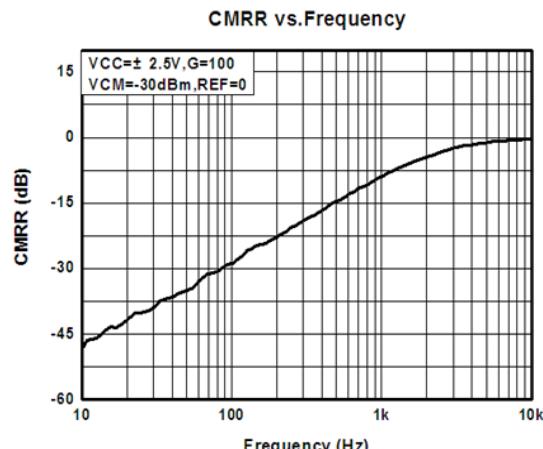


### PSRR & Frequency

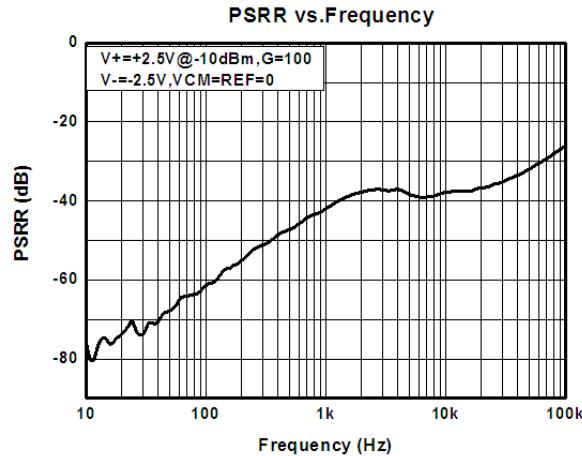


### Large Signal Response

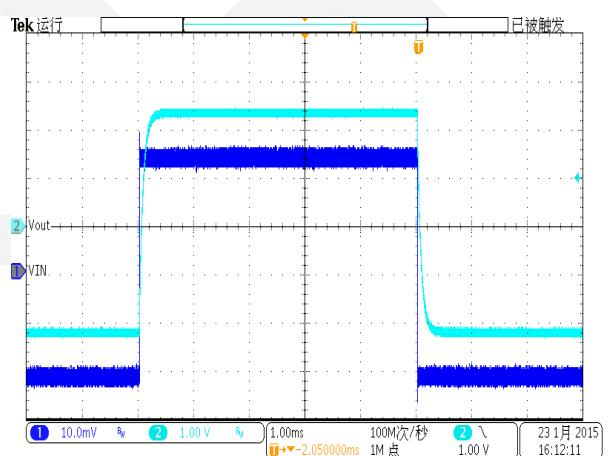

### Over Load Recovery Time

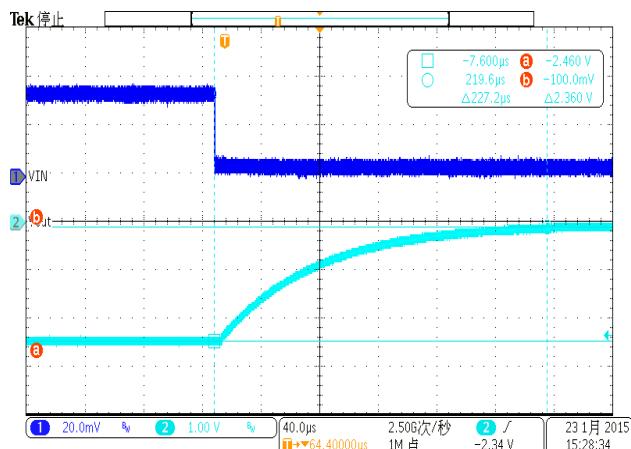

### Over Load Recovery Time

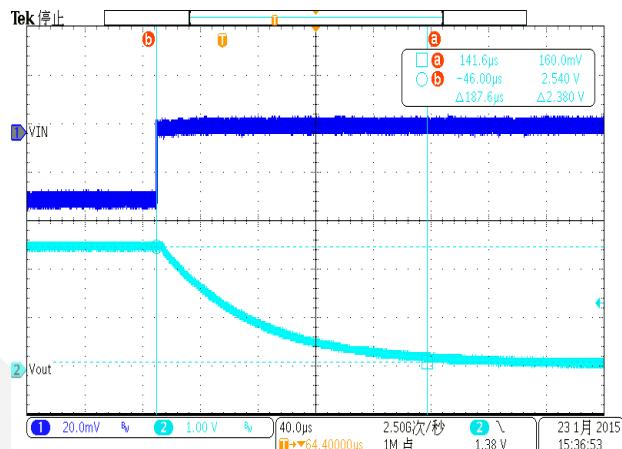



## CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.